



Cloud Administration Tools Guide

Copyright © 2026 OneStream Software LLC. All rights reserved.

All trademarks, logos, and brand names used on this website are the property of their respective owners. This document and its contents are the exclusive property of OneStream Software LLC and are protected under international intellectual property laws. Any reproduction, modification, distribution or public display of this documentation, in whole or part, without written prior consent from OneStream Software LLC is strictly prohibited.

Table of Contents

Overview	1
Application Management	1
Key Management	1
Setup and Installation	2
Dependencies	2
Install Cloud Administration Tools	2
Set Up Cloud Administration Tools	3
Create Tables	4
Package Contents	4
Settings	5
Global Options	5
Email Connection	6
Domain	6
OneStream URL	6

Table of Contents

Authentication Provider	6
Directory ID	6
Client ID	7
Client Secret	7
Security Role	7
Uninstall	8
Home	9
Application Management	11
Application Details	12
Copy Application	13
Source	13
Target	13
Application Properties	14
Database Properties	15
Confirm Summary	16
Remove Application	17

Table of Contents

Confirmation Summary	18
Application History	18
Key Management	20
Bring Your Own Key	20
Enable Key Management	21
Key Information	21
Disable Key Management	22
Refresh	22
Certificates (Available Only with Platform 8.x)	22
Upload Certificates	23
Certificate Versions	24
Refresh	24
Export Certificates	24
Import Certificates	24
View Snippet	25
Remove Certificates	25

Table of Contents

Secrets (Available Only with Platform 8.0)	26
Upload Secrets	26
Secret Versions	27
Refresh	27
Export Secrets	27
Import Secrets	28
View Snippet	28
Remove Secrets	28
Help and Miscellaneous Information	29
Cloud Database Best Practices	29
Cloud Database Space	29
Cloud Services Team Updates	30
Display Settings	30
Package Contents and Naming Conventions	30
OneStream Solution Modification Considerations	31
Troubleshooting	32

Table of Contents

Dashboard Rendering Errors32

Overview

Cloud Administration Tools is a solution that contains access to multiple cloud service functions, each enabling OneStream Cloud Administrators to perform their role with greater efficiency.

Application Management

Application Management maintains OneStream applications in a cloud environment. System administrators can copy existing applications, and create, replace, or remove new applications within OneStream. With Application Management, administrators can make changes for testing or archival purposes.

This functionality is only available to members of the administrator's security group.

Key Management

Key Management enables administrators to manage Azure Key Vaults by uploading .pfx encrypted files. Administrators on Platform 8.0 can manage secrets and certificates as well. The loss of service availability due to expired keys does not count against OneStream availability

Setup and Installation

This section contains important details related to the planning, configuring, and installation of your solution. Before you install the solution, familiarize yourself with these details.

See [OneStream Solution Modification Considerations](#).

Dependencies

Component	Description
OneStream 8.5.0 or later	Minimum OneStream Platform version required to install this version of Cloud Administration Tools.

Install Cloud Administration Tools

1. In the OneStream Solution Exchange, go to OneStream Solutions and select the **Cloud Administration Tools Solution** solution tile.



Cloud Administration Tools


Setup and Installation

2. On the **Cloud Administration Tools Solution** page, in the **Platform Version** drop-down list, select the appropriate OneStream Platform version.
3. In the **Solution Version** drop-down list, select the most recent version. Click **Download**.
4. Log into OneStream.
5. On the **Application** tab, go to **Tools > Load/Extract**.
6. On the **Load** tab, use the **Select File** icons to locate the solution package. Click **Open**.
7. When the solution file name appears, click **Load**.
8. Click **Close** to complete the installation.

Set Up Cloud Administration Tools

The first time Cloud Administration Tools is run, you are guided through the table setup process.



- In OneStream, go to **Community Solution > Dashboards > Cloud Administration Tools > Cloud Administration Tools**.

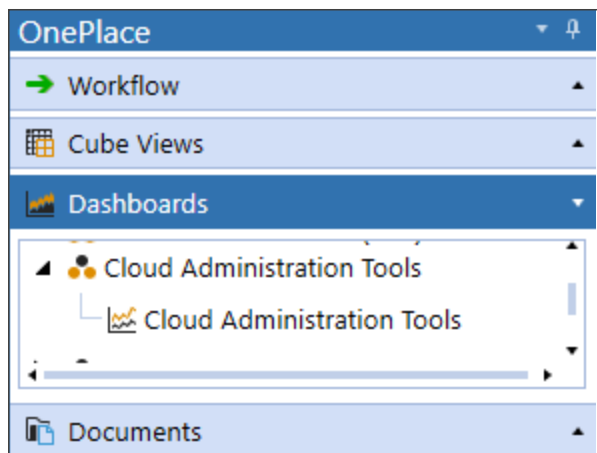

Create Tables

1. Click **Step 1: Create Tables**.

This step may be necessary when upgrading even if tables are already present. Cloud Administration Tools will not remove any tables that already exist but will modify table structures and add new ones if necessary.



2. When setup is complete, click **Step 2: Launch Solution** to open Cloud Administration Tools.

Package Contents

The Dashboard Maintenance Unit provides the user interface for Cloud Administration Tools and includes the required Dashboard Groups, Components, Data Adapters, Parameters, and files.

Settings



The **Settings** page contains the **Global Options** tab in which key properties that guide administration are set as well as **Uninstall** options.

Global Options

The **Global Options** page contains key properties that guide global Cloud Administration Tools administration.

Global Options

Uninstall

Email Connection: OneStreamEmail

Domain:

OneStream URL:

Authentication Provider:

Directory ID:

Client ID:

Client Secret:

Security Role: Administrators

Save

Email Connection

Select an email connection from the drop-down list. The email connections are configured in the OneStream Application Server Configuration File and contain all the necessary setup information for the local email provider, including the sending email address, server credentials, host, and port. The email connections list is pulled from the Database Server Connections list in the Application Server Configuration File.

For more details on email database connections, see the *Installation and Configuration Guide*. This setting can be changed by the administrator to send emails from a different connection.

Domain

The Azure Active Directory (Azure AD) domain name is @mydomain.onestreamcloud.com and should not be modified with the exception of a direction by Support.

OneStream URL

The Azure URL of the customer environment is https://xxxxxx.onestreamcloud.com/onestreamweb and should not be modified with the exception of a direction by Support.

Authentication Provider

The name of the authentication provider service for the OneStream Framework database in this server environment. Do not modify this setting unless directed to do so by Support.

Directory ID

This directory ID is the Azure Tenant ID.

Client ID

The client ID is configured by the OneStream Cloud Services Team. This encrypted key is masked and will display as a blank entry after the initial setup. Do not modify this setting unless directed to do so by Support.

Client Secret

The client secret is used to authenticate with the Azure Active Directory service.

Security Role

Since security is governed at the global level, it is the assignment of the user group to the Security Role that determines who will be global Cloud Administration Tools Administrators. This group is granted access to all areas of Cloud Administration Tools and are the only users who can see the Settings Page icon.

Uninstall

Use the Uninstall feature to remove the Cloud Administration Tools User Interface or the entire solution. If part of an upgrade, any modifications performed on standard Cloud Administration Tools objects are removed. These are the uninstall options:

- **Uninstall UI** removes Cloud Administration Tools, including related dashboards and business rules, but retains the database and related tables. For some releases, perform this step before accepting a new solution version as some of the dashboards or other objects may have changed. Choose this option to update Cloud Administration Tools without removing the data tables. The Release Notes indicate if an overinstall is supported.
- **Uninstall Full** removes all related data tables, data, and Cloud Administration Toolsdashboards and business rules. Choose this option to completely remove Cloud Administration Tools or to perform an upgrade that is so significant in its changes to the data tables that this method is required.

CAUTION: Uninstall procedures are irreversible.

Home

The Home page displays the functionality enabled through Global Settings.

Cloud Administration Tools

0 Applications DEV1 | 36 Applications PRD1

Application Console
Copy Application
Remove Application

Status	Action Taken	Database Indexing	Source Environment	Source Application	Target Environment	New Application Name	Application Replaced	Start Time	End Time	User
Succeeded	Copy	No	PRD1	PV850_TMF	PRD1	QATest2		5/7/2026 4:06:00 PM	5/7/2026 4:18:02 PM	Admintrmf
Succeeded	Remove		PRD1	Dynatrace_Test				5/7/2026 3:54:55 PM	5/7/2026 3:58:41 PM	Admintrmf
Succeeded	Copy	No	PRD1	SO_GolfStream_v81	PRD1	Dynatrace_Test		5/7/2026 3:40:44 PM	5/7/2026 3:49:45 PM	Admintrmf
Succeeded	Copy	No	PRD1	ONC_ED	PRD1	EDRegression85		5/5/2026 8:17:44 PM	5/5/2026 8:34:17 PM	OneNav_AdminED
Failed	Remove		PRD1	testcopywithlogging				5/4/2026 2:43:31 PM	5/4/2026 2:57:03 PM	
Succeeded	Copy	No	PRD1	Dev	PRD1	testgindynalogging4322		5/4/2026 2:38:27 PM	5/4/2026 2:53:30 PM	
Succeeded	Remove		PRD1					5/4/2026 2:18:59 PM	5/4/2026 2:45:18 PM	
Succeeded	Copy	No	PRD1		PRD1			5/4/2026 2:18:39 PM	5/4/2026 2:41:57 PM	
Succeeded	Remove		PRD1	testcopywithlogging				5/4/2026 2:11:52 PM	5/4/2026 2:31:25 PM	
Succeeded	Copy	No	PRD1	Dev	PRD1			5/4/2026 2:11:22 PM	5/4/2026 2:27:54 PM	
Failed	Copy	No	PRD1	Dev	PRD1			5/4/2026 2:02:46 PM	5/4/2026 2:05:02 PM	
Succeeded	Remove		PRD1					5/1/2026 3:58:02 PM	5/1/2026 4:14:35 PM	
Succeeded	Remove		PRD1					5/1/2026 3:55:29 PM	5/1/2026 4:04:30 PM	
Succeeded	Remove		PRD1					5/1/2026 3:47:42 PM	5/1/2026 3:59:44 PM	

1. Navigational Tabs

- **Home:** Enables system administrators to monitor users, applications, and key performance metrics in one centralized location.
- **Application Management:** Enables system administrators to create, replace, or remove applications within the OneStream Azure environment.
- **Key Management:** Enables system administrators to manage the key vault and Bring Your Own Key (BYOK) settings.

2. Overview

- **Application Management Overview:** Displays a list of applications, their type, and current status, such as active or inactive.

3. Quick Links

System administrators can use quick links to navigate through the solution to perform key tasks. **4. Key Performance Indicators (KPIs)**

KPIs display an overview of the environment. Use the scroll bar to view additional metrics.

5. Settings

- **Reset IIS:** This button manually resets the environment.

IMPORTANT: Performing an IIS reset ends all tasks currently in progress.

- **Settings:** Icon that provides access to the Settings page.
- **Help:** Icon that links to solution documentation.

TIP: If the Home screen displays any errors or fails to render, see [Troubleshooting](#).

Application Management

⋮ **Application Management** enables you to create or replace applications as a copy of existing applications or remove applications within your OneStream Azure environment.

Administrators running platform version 6.x can use Application Management to copy, replace, and remove applications and view historical activity on applications.

When you launch Application Management, the **Application Console** displays all applications in grid view and includes the following information:

- **Application Name:** Title of the application.
- **Status:** Indicates if the application is online or deleted.
- **Created Date:** Indicates when the application was created.

Application Console

Application Name	Status	Created Date	
	Online	7/5/2023	
	Online	4/24/2023	
	Online	4/17/2023	
	Online	6/9/2023	
	Online	5/2/2023	
	Online	4/28/2023	
	Online	4/19/2023	
	Online	6/8/2023	
	Online	6/2/2023	

Application Details

Select an application to view the following application details:

Application Information

- Environment
- Owner
- Creation Date

Application History

- Action Taken
- User
- Start Time

Application Console

Application Name	Status	Created Date
...	Online	7/5/2023
...	Online	4/24/2023
...	Online	4/17/2023
...	Online	6/9/2023
...	Online	5/2/2023
...	Online	4/28/2023
...	Online	4/19/2023
...	Online	6/8/2023
...	Online	6/2/2023
...	Online	5/2/2023
...	Online	5/2/2023
...	Online	5/2/2023
...	Online	5/30/2023
...	Online	6/13/2023
...	Online	4/10/2023
...	Online	5/18/2023
...	Online	5/23/2023
...	Online	5/2/2023
...	Online	6/8/2023
...	Online	6/2/2023
...	Online	5/10/2023
...	Online	4/12/2023
...	Online	4/11/2023
...	Online	5/2/2023
...	Online	5/2/2023
...	Online	5/1/2023
...	Online	6/13/2023
...	Online	4/19/2023

Application Information

Environment: DEV1
Owner: @onestreamsoftware.com
Creation Date: 4/17/2023

Application History

Action Taken	User	Start Time
Copy	...	6/13/2023 8:51:47 PM
Copy	...	6/13/2023 6:37:57 PM
Copy	...	6/8/2023 2:51:51 PM
Copy	...	6/8/2023 2:27:21 PM

Copy Application

Administrators can create or replace applications across environments using the **Copy Application** tab in the Application Management solution.

NOTE: The maximum number of applications that can be within a single environment is 20.

Source

1 Source

Source Environment

Source Application

1. Select a **Source Environment**, which is the environment of the application being copied or replaced. The Source Environment will display active OneStream environments.
2. Select a **Source Application**, which is the data that will be copied to create a new application or replace an existing application. The Source Application will display all active OneStream applications.

Target

2 Target

Target Environment

Target Application


Application Management

1. Select a **Target Environment**, which is the environment where the source application data will be copied or replaced. Only the current environment can be selected from the drop-down list.
2. Select a **Target Application** to create a new application or replace an existing application. The drop-down list allows for a new application copy or displays all available applications that can be replaced.

IMPORTANT: Replacing the application removes all existing data and replaces it with a copy of the source application data.

Application Properties

Use **Application Properties** to configure options on the application being created or replaced.

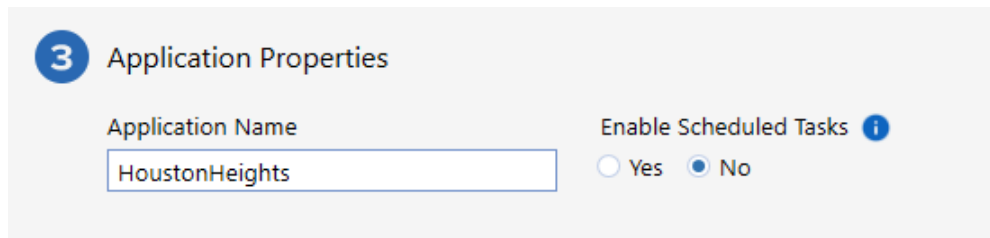

3 Application Properties

Application Name

Enable Scheduled Tasks **i**

Yes No

Application Name

Type a unique application name in the **Application Name** field.


NOTE: Application names can be 4–128 characters in length and contain the following characters: period, space, underscore, alphanumeric characters, and hyphen.

Enable Scheduled Tasks

Select **Yes** to carry over scheduled tasks from the source application to the target application. Select **No** to disable all tasks in the the target application.

Database Properties

Enable Database Indexing rebuilds indexes during maintenance windows.

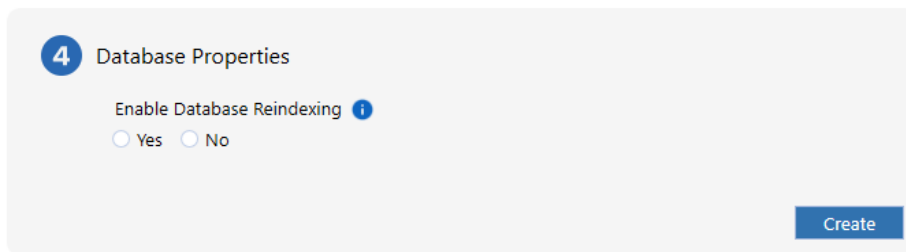

4 Database Properties

Enable Database Reindexing ⓘ

Yes No

Create

- Select **Yes** to enable.
- Select **No** to skip enabling.

NOTE: Due to increased maintenance times, it is recommended to enable database indexing on only one business critical application.

Create or Replace Application

Depending on the selection made in the Target Application field, the button will display as **Create** or **Replace**.


Create


If a new application is being created, a **Create** button displays.

Replace

If an existing application was selected in the Target Application drop-down list, a **Replace** button displays.


Create


 Database Properties

Enable Database Reindexing 

Yes No

Replace


 Database Properties

Enable Database Reindexing 

Yes No

Confirm Summary

The **Confirm** dialog box appears after the create or replace action runs. The **Confirm** dialog box displays the actions that must be confirmed. This confirmation also displays any warnings, such as if a production application is being created.

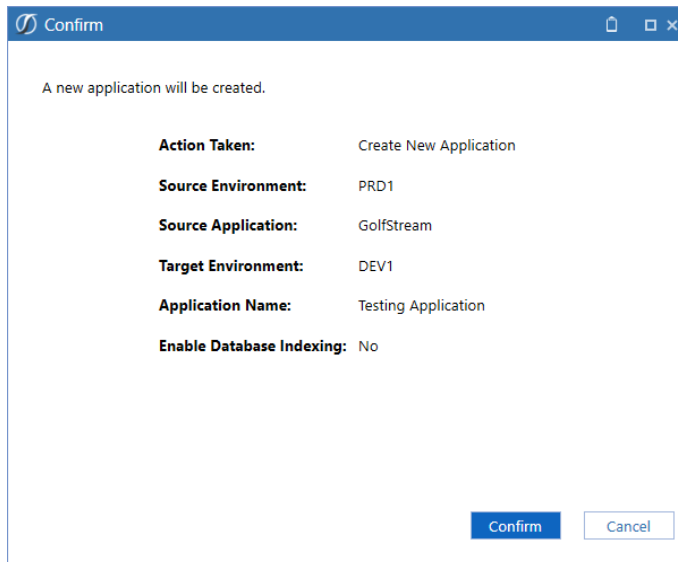

Application Management

1. Review the confirmation summary.
2. Click the **Confirm** button to accept the actions.

NOTE: If you choose to cancel or close the dialog box, you can make your corrections.


Once you confirm, the **Application History** page displays.

Remove Application

Administrators can remove applications using the **Remove Application** tab in Application Management.

[Application Console](#) [Copy Application](#) [Remove Application](#) [Application History](#)

Remove Application

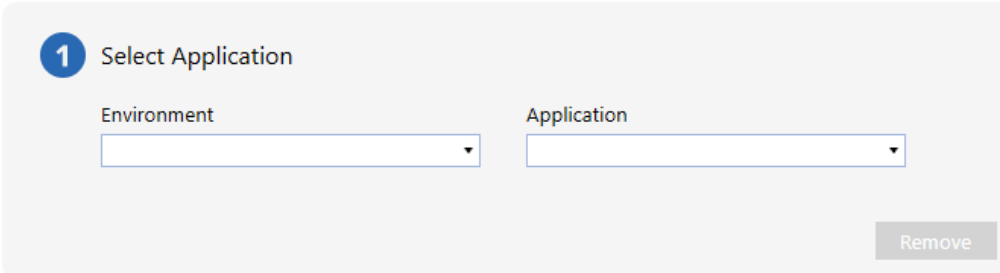

1 Select Application

Environment


Application

Remove

1. Click **Remove Application**.
2. Select the **Environment**.
3. Select the **Application**.
4. Click the **Remove** button.

Confirmation Summary


The **Confirm Remove Application** dialog box displays after the remove action runs. Click the **Confirm** button to accept the actions.

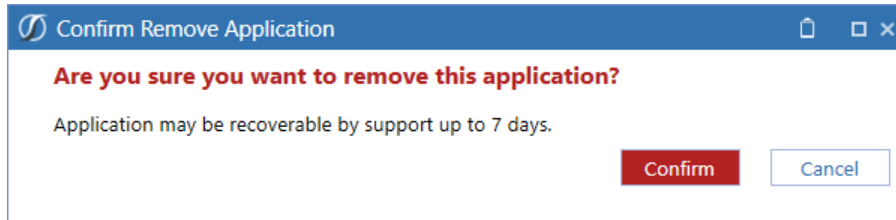


After you confirm, you will be taken to the **Application History** page.

NOTE: If you choose to cancel or close the dialog box, you can make corrections.

Application History

The **Application History** page displays detailed information on the operations completed through Application Management. Click  to filter data in the table.

Application History

 Refresh

Status	Action Taken	Database Indexing	Source Environment	Source Application	Target Environment	New Application Name	Application Replaced	Start Time	End Time	User
Completed	Copy	No	DEV1	Healthcare Development	DEV1	Old Test App	Replacement (DEV1) Prod 1 Dev	6/13/2023 8:51:47 PM	6/13/2023 9:02:31 PM	jenkins@proton
Completed	Copy	No	DEV1	Healthcare Development	DEV1	The Old		6/13/2023 6:37:57 PM	6/13/2023 6:46:14 PM	jenkins@proton
Completed	Remove		DEV1	Healthcare				6/13/2023 6:25:22 PM	6/13/2023 6:28:09 PM	jenkins@proton
Completed	Remove		DEV1	Healthcare				6/12/2023 1:41:24 PM	6/12/2023 1:44:03 PM	jenkins@proton

- **Status:** Shows the progression and results of all applications being created, replaced, or removed after the process starts. Application statuses include: **Running**, **Success**, or **Failed**.

NOTE: If the result is **Running**, click **Refresh** to see if the process has completed its action.

NOTE: If the result is **Failed**, navigate to the **Task Activity** dialog box to view a description of the error.

- **Action Taken:** Shows the action performed by the user. Displays **Copy** or **Remove** for all applications.
- **Enable Database Indexing:** Indicates whether the application will have indexes rebuilt during maintenance windows. Displays **Yes** or **No** for all applications.
- **Source Environment:** Displays the environment from which the Source Application is chosen.
- **Source Application:** Displays the data used to create a new application or to replace data in another application.
- **Target Environment:** Displays the environment where the new or replaced application was placed.
- **New Application Name:** Displays the name given to the created or replaced application.
- **Application Replaced:** Displays the name of the replaced application. If a new application was created, this field is blank .
- **Start Time:** Indicates the start time of the copy, replace, or remove process.
- **End Time:** Indicates the end time of the copy, replace, or remove process.
- **User:** Indicates the user who created, replaced, or removed the application.

Key Management



Key Management enables you to manage the OneStream Azure Key Vault and create keys, certificates, and secrets.

Bring Your Own Key

Our SaaS offering includes a robust key management service, ensuring the highest level of security for your data. Each client's key vault is uniquely deployed within our cloud infrastructure, enabling the Bring Your Own Key (BYOK) feature as part of our Cloud Administration Tools suite. This design guarantees that the lifecycle of your key vault is intrinsically linked to your specific instance, maintaining exclusivity and preventing access by other tenants.

You retain complete control over your keys through the Cloud Administration Tools interface, with keys securely stored in your private key vault, which is associated with a managed identity. Access to the key vault is stringently regulated; only the managed identity assigned to your OneStream instance's compute nodes and database server has the operational capability to manage keys, secrets, and certificates. This managed identity is granted specific roles—Certificates Officer, Crypto Officer, Service Encryption User, and Secrets Officer—to facilitate secure operations.

Network security measures are rigorously enforced to ensure that the key vault is accessible solely from your OneStream instance's network. Complementing these measures, we employ Azure policies and proactive alerting systems to safeguard against unauthorized changes to access policies. These policies are consistently reviewed in alignment with our SOC controls, further reinforcing our commitment to your data's security.

Key Management

Bring Your Own Key

Refresh Disable BYOK

Upload Key

Enter .pfx file password

Upload

Key Information

Status: Active
Thumbprint: [redacted]
Activation Date: 1/1/1970 12:00:00 AM
Expiration Date: 1/1/1970 12:00:00 AM

Thumbprint	Status	Created Date
[redacted]	Active	7/7/2023 2:09:56 PM
[redacted]	Disabled	7/7/2023 2:09:28 PM
[redacted]	Disabled	7/3/2023 6:44:16 PM
[redacted]	Disabled	7/3/2023 5:27:10 PM
[redacted]	Disabled	7/3/2023 5:26:58 PM
[redacted]	Disabled	7/3/2023 5:26:41 PM

Enable Key Management

To enable BYOK:

1. Click **Upload**.
2. Select a .pfx file.

NOTE: Users on Platform 8.0 or above can choose to upload .pem files.

3. Click **Open**.
4. Your key is uploaded directly to the Azure Key Vault and the uploaded file is automatically deleted.

Key Information

Select a key to view its:

- Name
- Status
- Azure thumbprint ID

Key Management

- Activation Date
- Expiration Date

Disable Key Management

Disable key management by clicking the **Disable BYOK** button. BYOK will be disabled and your data will be managed by the service.

Refresh



This refreshes information in the grid.

Certificates (Available Only with Platform 8.x)

Certificates and their corresponding keys can be used for more secure authentication to APIs, FTP servers, and other integrations. Each certificate contains a thumbprint ID that can be used in the Azure configuration tiles to identify which key is in use. The certificate interface enables system administrators to securely store these for later use in business rules.

Key Management

Certificates

Refresh

Upload Certificate

Certificate Name:

Key Type: HSM Non-HSM

Password:

Upload **Cancel**

Name	Status	Created Date	Expiration Date
	Active	7/10/2023 3:41:36 PM	5/16/2024 9:25:55 PM
	Active	7/7/2023 2:11:28 PM	5/16/2024 9:25:55 PM
	Active	7/6/2023 6:18:24 PM	5/16/2024 9:25:55 PM
	Active	6/27/2023 2:48:51 PM	5/16/2024 9:25:55 PM
	Active	6/26/2023 4:21:44 PM	5/16/2024 9:25:55 PM
	Active	6/26/2023 4:20:31 PM	5/16/2024 9:25:55 PM
	Active	6/26/2023 4:19:53 PM	5/16/2024 9:25:55 PM
	Active	6/26/2023 3:56:58 PM	5/16/2024 9:25:55 PM
	Active	6/26/2023 3:56:33 PM	5/16/2024 9:25:55 PM
	Active	6/26/2023 3:55:01 PM	5/16/2024 9:25:55 PM
	Active	6/26/2023 3:54:25 PM	5/16/2024 9:25:55 PM
	Active	6/26/2023 3:53:38 PM	5/16/2024 9:25:55 PM

Certificate Versions

Version	Status	Created Date	Expiration
Current Version			
9335a9b64a1846daa1fe1cfd75214b83	Active	6/27/2023 2:48:51 PM	5/16/2024 9:25:55 PM
Previous Versions			
Version	Status	Created Date	Expiration Date
	Active	6/27/2023 2:48:15 PM	5/16/2024 9:25:55 P
	Active	6/27/2023 2:47:56 PM	5/16/2024 9:25:55 P
	Active	6/27/2023 2:47:10 PM	5/16/2024 9:25:55 P
	Active	6/27/2023 2:46:22 PM	5/16/2024 9:25:55 P
	Active	6/27/2023 2:46:09 PM	5/16/2024 9:25:55 P
	Active	6/27/2023 2:45:58 PM	5/16/2024 9:25:55 P
	Active	6/27/2023 2:45:46 PM	5/16/2024 9:25:55 P
	Active	6/27/2023 2:45:29 PM	5/16/2024 9:25:55 P
	Active	6/27/2023 2:45:16 PM	5/16/2024 9:25:55 P

View Snippet **Delete Certificate**

Upload Certificates

To create a new certificate:

1. Enter a certificate name.

NOTE: Certificate names should be 127 characters or less.

2. Under **Key Type**, select **HSM** or **Non-HSM**.

NOTE: HSM is a physical device providing extra protection for sensitive keys. Using an HSM will permanently prevent exporting the private key in the future.

3. Enter a password.
4. Click the **Upload** button.
5. Select a .pfx file.
6. Click **Open**.

Certificate Versions

Select a certificate to view its status, creation and expiration dates, current version number, and previous versions.

Refresh



This refreshes information in the grid.

Export Certificates

Exporting certificates out of Cloud Administration Tools is a bulk process and will export all certificates.

To export certificates:

1. Click **Export**.
2. Enter a password.

NOTE: This password will be required when the file is imported back into Cloud Administration Tools.

3. Click **Okay**. An encrypted file containing all certificates is downloaded to the OneStream file share.

Import Certificates

To import certificates:

Key Management

1. Click **Import**.
2. Your local File Explorer will open. Select a file.
3. Fill in the password you chose when exporting the file.
4. The certificates will load in Cloud Administration Tools.

The import process does not overwrite existing certificates. However, if existing certificates share the same name as those contained in the file you are importing, it will need to be removed for the bulk import to process successfully.

View Snippet

Click the **View Snippet** button to retrieve a sample BRAPI code of the certificate, which can be copied and used in your business rules.

Certificate X509Certificate2

```
BRApi.Utilities.GetCertificate(SessionInfo si, string certificateName)
```

This BRApi is used to access a certificate or key from within a business rule to load it into memory. It cannot be used with HSM backed keys.

Certificate Signature String

```
BRApi.Utilities.Sign(SessionInfo si, string keyName, string algorithm, byte[]  
digest)
```

This BRApi is used to generate a signature using a key stored in the key vault without extracting the key. This can be used with both HSM and non-HSM backed keys.

Remove Certificates

The **Delete Certificate** button enables you to delete a certificate.

NOTE: After you delete a certificate, you cannot reuse the same certificate name for 90 days.

Secrets (Available Only with Platform 8.0)

Secrets enable system administrators to securely store sensitive information like passwords, API keys, or connection strings for later use in business rules.

Secrets

The screenshot displays the Secrets management interface. At the top right, there are two buttons: 'View Snippet' and 'Delete Secret'. Below these is a 'Refresh' icon. The main area is divided into two panels. The left panel, titled 'Upload Secret', contains two input fields: 'Name: *' and 'Secret value: *', with an 'Upload' button below them. Below the upload form is a list of existing secrets with columns for 'Name' and 'Value'. The right panel, titled 'Secret Versions', shows the 'Current Version' and a table of 'Previous Versions'. The 'Current Version' section shows a redacted secret name and a creation timestamp of 7/7/2023 2:13:12 PM. The 'Previous Versions' table has two columns: 'Version' and 'Created'.

Version	Created
[Redacted]	7/6/2023 6:52:45 PM
[Redacted]	7/6/2023 5:51:36 PM
[Redacted]	6/14/2023 8:57:13 PM
[Redacted]	6/14/2023 8:56:52 PM
[Redacted]	6/14/2023 8:30:37 PM
[Redacted]	6/9/2023 12:51:35 PM
[Redacted]	6/9/2023 12:50:42 PM
[Redacted]	6/9/2023 12:49:58 PM

Upload Secrets

To create a new secret:

Key Management

1. Enter a secret name.

NOTE: After you delete the name of a secret, you cannot reuse the same name for 90 days.

2. Enter a secret value.
3. Click the **Upload** button.

Secret Versions

Select a secret to view the current version number, previous version number, and creation dates.

Refresh



This refreshes information in the grid.

Export Secrets

Exporting secrets out of Cloud Administration Tools is a bulk process and will export all secrets. To export secrets:

1. Click **Export**.
2. Enter a password.

NOTE: This password will be required when the file is imported back into Cloud Administration Tools.

3. Click **Okay**. An encrypted file containing all secrets is downloaded to the OneStream file share.

Import Secrets

To import secrets:

1. Click **Import**.
2. Your local File Explorer will open. Select a file.
3. Fill in the password you chose when exporting the file.
4. The secrets will load in Cloud Administration Tools.

The import process does not overwrite existing secrets. However, if existing secrets share the same name as those contained in the file you are importing, it will need to be removed for the bulk import to process successfully.

View Snippet

Click the **View Snippet** button to retrieve a sample BRAPI code of the secret, which can be copied and used in business rules.


Secret Value String

```
BRApi.Utilities.GetSecretValue(SessionInfo si, string secretName)
```

Remove Secrets

Click the **Delete Secret** button to delete a secret that is no longer in use.

Help and Miscellaneous Information

 This page contains solution documentation.

Cloud Database Best Practices

Use the following best practices.

Cloud Database Space

When managing applications, if the Azure capacity is insufficient to copy an entire application, the copy process stops and an error message displays. OneStream Support may be able to increase your available storage at an additional cost or you may free up space by using **Remove Application** in **Application Management** to delete applications that are no longer needed.



Cloud Services Team Updates

OneStream may periodically release updates to Cloud Administration Tools to provide new functionality, address undesired behavior, or retire features that are no longer supported. These changes are displayed in Cloud Administration Tools. In addition, these changes are reflected in the Dashboard Maintenance report, which can be run from OneStream's Navigation Center solution.

Display Settings

OneStream Solutions frequently require the display of multiple data elements for proper data entry and analysis. Therefore, the recommended screen resolution is a minimum of 1920 x 1080 for optimal rendering of forms and reports.

Package Contents and Naming Conventions

The package file name contains multiple identifiers that correspond with the platform. Renaming any of the elements contained in a package is discouraged in order to preserve the integrity of the naming conventions.

Example Package Name: CAT_PV8.5.0_SV100_PackageContents.zip

Identifier	Description
CAT	Solution ID
PV8.5.0	Minimum Platform version required to run solution

Identifier	Description
SV100	Solution version
PackageContents	File name

OneStream Solution Modification Considerations

A few cautions and considerations regarding the modification of OneStream Solutions:

- Major changes to business rules or custom tables within a OneStream Solution will not be supported through normal channels as the resulting solution is significantly different from the core solution.
- If changes are made to any dashboard object or business rule, consider renaming it or copying it to a new object first. This is important because if there is an upgrade to the OneStream Solution in the future and the customer applies the upgrade, this will overlay and wipe out the changes. This also applies when updating any of the standard reports and dashboards.
- If modifications are made to a OneStream Solution, upgrading to later versions will be more complex depending on the degree of customization. Simple changes such as changing a logo or colors on a dashboard do not impact upgrades significantly. Making changes to the custom database tables and business rules, which should be avoided, will make an upgrade even more complicated.


Troubleshooting

Dashboard Rendering Errors

When the Cloud Administration Tools encounters any dashboard rendering errors, a troubleshooting dashboard will be populated.

On this dashboard, users can see where the error occurred, a brief error message, and steps for troubleshooting the error.

NOTE: Errors will still be tracked in the error log.

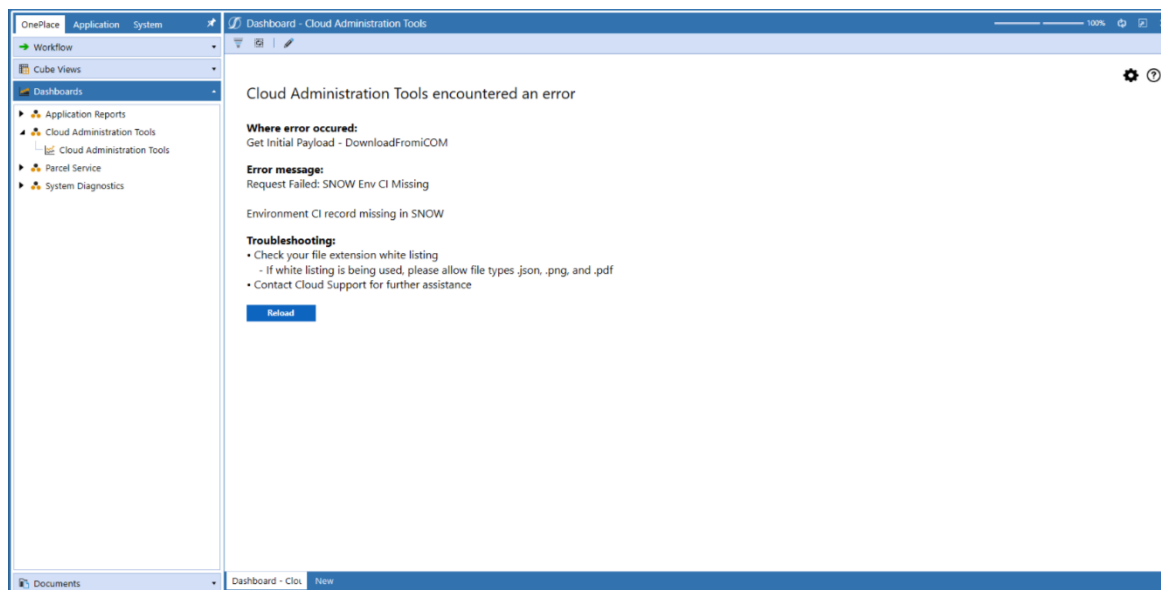

Reload: Use this button to reload the dashboard, during which time the application will clear out unused discover dashboard .json files. If this resolves the issue, users will be redirected to the Cloud Administration Tools homepage, otherwise the troubleshooting dashboard will populate again. The reload button can be used to reassess the issue twice before the button is taken away and users are prompted to contact Cloud Support.