



Compliance Guide

Copyright © 2025 OneStream Software LLC. All rights reserved.

Any warranty with respect to the software or its functionality will be expressly given in the Subscription License Agreement or Software License and Services Agreement between OneStream and the warrantee. This document does not itself constitute a representation or warranty with respect to the software or any related matter.

OneStream Software, OneStream, Extensible Dimensionality, and the OneStream logo are trademarks of OneStream Software LLC in the United States and other countries. Microsoft, Microsoft Azure, Microsoft Office, Windows, Windows Server, Excel, Internet Information Services, Windows Communication Foundation and SQL Server are registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. DevExpress is a registered trademark of Developer Express, Inc. Cisco is a registered trademark of Cisco Systems, Inc. Intel is a trademark of Intel Corporation. AMD64 is a trademark of Advanced Micro Devices, Inc. Other names may be trademarks of their respective owners.

Table of Contents

Overview	7
OneStream Compliance Solutions	7
Relational Blending Engine and Compliance	7
Traditional Compliance Approaches and Problems	8
OneStream Compliance with Data Blending	8
Installation & Setup	10
Dependencies	10
Select the Compliance Development Location	10
Production OneStream Application	11
Development OneStream Application	11
Application Server Settings	11
Configure the OneStream Application Server	12
Install Compliance	13
Set Up Compliance	14

Table of Contents

Create Tables	16
Package Contents	17
Home	22
People Register	24
Calculate a Plan	24
Delete a Plan	24
Complete a Workflow	25
Revert a Workflow	25
People Register Taskbar	25
Calculation Definition	29
Global Drivers	30
Allocation Methods	30
Allocation Method Detail	32
Calculation Plans	33
Execution List	36
Import Calculation Definitions with an Excel Template	37

Table of Contents

Audit	38
Audit Logs	39
Audit Report	39
Audit Files	40
Settings	41
Global Options	41
Security Group [View Employee Name]	42
Security Group [Manage Calculation Definition]	42
Default Plan Start Period	42
Default Plan End Period	42
Calculate Before Complete Workflow	42
Workflow Profile Suffix [Auto Load]	43
Workflow Profile [Central Register Mgmt]	43
Workflow Profile [Source Connector Criteria]	43
Scenario [Source Connector Criteria]	43
Time [Source Connector Criteria]	43

Table of Contents

Parallel Batch Size [Lower = More Parallelism]	43
Use Parallel Save	44
Global Options for Compliance	44
Enable Journal Loading	44
Top Entity for Journals	44
Journal Cons Member	45
Activity Types	45
Accounts	46
Control Lists	47
Code Fields	48
Status List	48
Register Field Types	49
Register Field Order	50
Register Field List	51
Plan Periods	53
Mass Update	53

Table of Contents

Uninstall	55
Import Register Data	56
Create Data Source	56
Transformation Rules	58
Workflow Profile	58
Help & Miscellaneous Information	58
Display Settings	59
Package Contents & Naming Conventions	59
Solution Database Migration Advice	60
OneStream Solution Modification Considerations	61
Appendix A: Expressions	62
Appendix B: Substitution Variables	64
Appendix C: Calculations (Allocation Methods)	66
Appendix D: Custom Event Model	70
Set up the Custom Event Model	70
Available Events	71

Table of Contents

Before / After Selection Changed Events71

Before / After Save Data Events72

Register Restriction on Calculation Event73

Appendix E: Solution Audit BR Functions 74

 TCR_SolutionHelper Code and Sample Calls 75

Appendix F: Excel Templates77

 Loading Excel Templates to Custom Tables77

Overview

OneStream Compliance Solutions

The OneStream Compliance Solutions are a group of similar applications created around a common OneStream Relational Blending framework. Each has been configured to focus on a single Compliance subject.

OneStream Compliance Solutions include:

- Reporting Compliance
- Contract Compliance
- Thing Compliance

Relational Blending Engine and Compliance

Compliance relates to the Financial Close process and is used to generate the appropriate adjustments to an existing financial model for use cases such as adjustments needed for leasing compliance, revenue recognition compliance, or adjustments for local GAAP or other statutory reasons.

Traditional Compliance Approaches and Problems

All Compliance tasks share a common challenge. Creating an analytic model to represent a compliance process is very difficult without knowing how many items will be planned. The nature of analytic compliance requires building a Cube and defining its Dimensions with the appropriate Dimension members like Products, Employees, or Assets. This is where the problems begin. How many assets should be added to the Asset Dimension in the Reporting Compliance Cube? How many new hire employees should be added to the Employee Dimension in the Workforce Compliance Cube? These questions are impossible to answer, and nobody can predict how many items someone intends to add to a plan. Consequently, it is impossible to build Dimensions in advance of the compliance process which leads to intensive Cube and Dimension maintenance activities. In addition, adding each asset or employee to an analytic model can create Dimensions with many members which can lead to processing performance problems.

OneStream Compliance with Data Blending

The OneStream Compliance Engine blends the relational data and analytic model capabilities of the OneStream Platform. This creates a completely different way to approach the unknown nature of the Compliance process. The Compliance solution uses a relational table (Register) to collect the items intended for compliance, like People, Assets, Projects, or Contracts. It then applies calculations to the register items, which results in an output table that consists of an accounting distribution, like an Accounts Payable or Receivable Sub-System Distribution. The resulting distribution is then mapped and automatically loaded into the analytic model at a summary level. By loading summary data into the analytic model, the metadata maintenance and performance burden associated with the traditional analytic-only approach is virtually eliminated.

Table of Contents

Using the relational blending approach eliminates having to know in advance how many items a user will plan. A user can add as many register items as he/she needs without the system administrator having to change the Compliance model's metadata. The reason for this is that a relational table is used to hold the register and derive the calculations. The analytic model is only loaded with summary data, which in turn keeps calculation performance optimal. Even better, the relational detail register information is still accessible from the analytic model via OneStream's built in drill-down capabilities.

The Compliance Engine allows more efficient Compliance models to be built and rapidly deployed. The following sections provide an overview of the Reporting Compliance implementation which is a part of the Compliance Engine. The same concepts defined for Reporting Compliance span all applications in the Compliance solutions. The only differences between the applications are the fields defined in the Register table, like what is being planned and the types of prebuilt calculations required to support the application, such as Double Declining Balance Depreciation or Interest Expense.

Installation & Setup

This guide describes the necessary steps to set up and use the Reporting Compliance solution as an example since many of these concepts are the same across these solutions. Knowledge of these common steps can be used to set up any of the Compliance solutions. Differences between solutions will be noted where needed.

This section contains important details related to the planning, configuring, and installation of your solution. Before you install Compliance, familiarize yourself with these details.

Dependencies

Component	Description
OneStream 6.2 or later	Minimum OneStream Platform version required to install this version of Compliance.

Select the Compliance Development Location

Before beginning installation, decide whether to build Compliance directly in the Production OneStream application or in a separate Development OneStream application. This section provides some key considerations for each option.

Production OneStream Application

The primary advantage of building Compliance in a Production application is that you will not have to migrate the resulting work from a Development application. However, there are intrinsic risks when making design changes to an application that is being used in a Production capacity and this is seldom advised.

NOTE: It is strongly recommended that you implement Compliance in the Development environment with a fresh copy of the Production application before starting work.

Development OneStream Application

As a Best Practice, build your Compliance solutions in the Development OneStream application using the following procedure:

1. Ensure all the OneStream artifacts relating to Compliance such as **Workflow Profiles** and **Entities** are in the Production application.
2. Copy your Production OneStream application to your Development environment and rename it. This Development version will be used for your Compliance project.

Application Server Settings

You may need to edit the OneStream Application Server Configuration so users can create and change data in the additional database tables. If other OneStream Solutions (such as Specialty Planning) are already in the application, these adjustments may already exist.

See also: [Solution Database Migration Advice](#)


Configure the OneStream Application Server

Before you begin, make sure these security group settings include the users who work on and set up Compliance solutions.

NOTE: Group settings are applicable to all OneStream Solutions; it is important to keep the group names generic.

1. Start the OneStream Server Configuration Utility as an Administrator.
2. Select **Open Application Server Configuration File > Database**.
3. Edit the following OneStream Database Server properties:
 - **Access Group for Ancillary Tables:** Select a group that includes those who will access records.
 - **Can Create Ancillary Tables:** True
 - **Can Edit Ancillary Table Data:** True
 - **Maintenance Group for Ancillary Tables:** Select a group who will edit and maintain tables.

- **Table Creation Group for Ancillary Tables:** Select a group who can create tables.

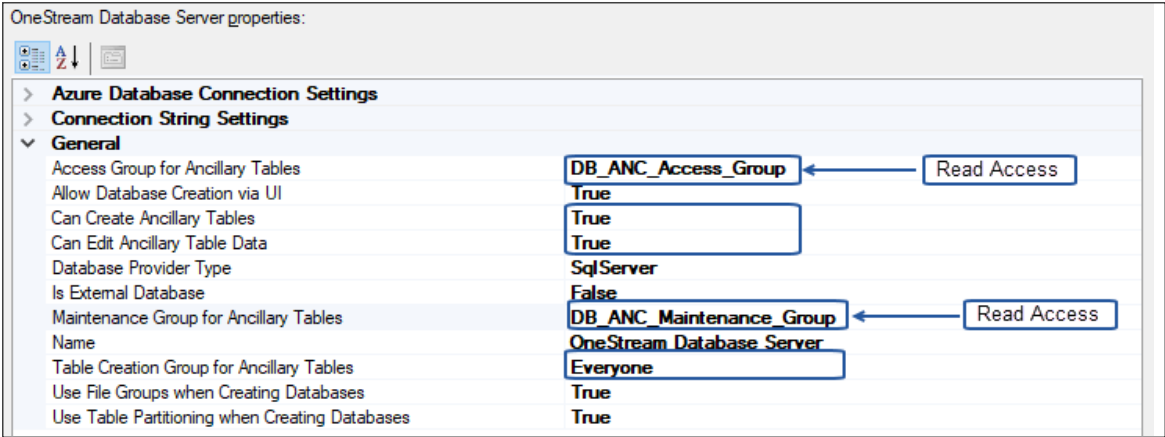

4. Restart Internet Information Server.

Install Compliance

The Reporting Compliance solution demonstrates all procedures in this document. Any solution in the Compliance collection follows the same procedure unless otherwise noted.

1. In the OneStream Solution Exchange, go to **OneStream Solution > Reporting Compliance**.



2. On the Compliance Solution page, select the appropriate OneStream platform version from the **Minimum Platform Version** drop-down list.
3. Select the most recent version from the **Solution Version** drop-down list and click **Download**.
4. Log in to OneStream.
5. On the **Application** tab, click **Tools > Load/Extract**.
6. On the **Load** tab, locate the solution package using the **Select File** icons and click **Open**.
7. When the solution's file name appears, click **Load**.
8. Click **Close** to complete the installation.

Set Up Compliance

The first time Compliance runs, you are guided through the table setup process.

In OneStream, click **Community Solution > Dashboards > Reporting Compliance > Reporting Compliance**.



Table of Contents

NOTE: Before running the set up, confirm that the account used to access SQL server has table creation rights on the SQL database to create the custom tables.














































Create Tables












1. Click **Step 1: Create Tables**

The first step of the setup creates all the tables and Cubes required for the Compliance solution being installed.

This step may be necessary when upgrading even if tables are already present.

Compliance will not drop any tables that already exist but will modify table structures and add any new ones if necessary. Each Compliance solution includes its own set of database tables that are added to the application database when they are installed.

 XFW_TCC_ActivityAccounts	 XFW_TCM_ActivityAccounts	 XFW_TCR_ActivityAccounts
 XFW_TCC_ActivityClass	 XFW_TCM_ActivityClass	 XFW_TCR_ActivityClass
 XFW_TCC_ActivityClassItems	 XFW_TCM_ActivityClassItems	 XFW_TCR_ActivityClassItems
 XFW_TCC_ActivityTypes	 XFW_TCM_ActivityTypes	 XFW_TCR_ActivityTypes
 XFW_TCC_AuditLog	 XFW_TCM_AuditLog	 XFW_TCR_AuditLog
 XFW_TCC_CalcPlan	 XFW_TCM_CalcPlan	 XFW_TCR_CalcPlan
 XFW_TCC_CalcPlanDetail	 XFW_TCM_CalcPlanDetail	 XFW_TCR_CalcPlanDetail
 XFW_TCC_ControlListItems	 XFW_TCM_ControlListItems	 XFW_TCR_ControlListItems
 XFW_TCC_ExecutionList	 XFW_TCM_ExecutionList	 XFW_TCR_ExecutionList
 XFW_TCC_GlobalDrivers	 XFW_TCM_GlobalDrivers	 XFW_TCR_GlobalDrivers
 XFW_TCC_Plan	 XFW_TCM_Plan	 XFW_TCR_Plan
 XFW_TCC_Register	 XFW_TCM_Register	 XFW_TCR_Register
 XFW_TCC_RegisterCommentary	 XFW_TCM_RegisterCommentary	 XFW_TCR_RegisterCommentary
 XFW_TCC_RegisterDetail	 XFW_TCM_RegisterDetail	 XFW_TCR_RegisterDetail
 XFW_TCC_RegisterSupport	 XFW_TCM_RegisterSupport	 XFW_TCR_RegisterSupport

 XFW_TLP_ActivityAccounts
 XFW_TLP_ActivityClass
 XFW_TLP_ActivityClassItems
 XFW_TLP_ActivityTypes
 XFW_TLP_AuditLog
 XFW_TLP_CalcPlan
 XFW_TLP_CalcPlanDetail
 XFW_TLP_ControlListItems
 XFW_TLP_ExecutionList
 XFW_TLP_GlobalDrivers
 XFW_TLP_Plan

 XFW_TLP_Register
--

Table of Contents


NOTE: These tables are the tables that are created in the OneStream application database for the installed Compliance solutions.

2. When setup is complete, click **Step 2: Launch Solution** to open Compliance.

Package Contents

Each Compliance solution has its own Dashboard Maintenance Unit containing all of the Components solution's user interface, required Dashboard Groups, Components, Data Adapters, Parameters and Files.


NOTE: The naming convention used to identify solution components is **XFW <Solution Name> (Abbv)**. For example, Reporting Compliance becomes **XFW Reporting Compliance (TCR)**.

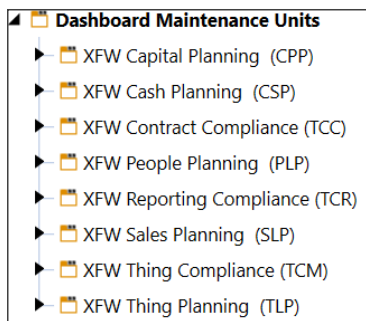

Do not rename or modify any Component included in the package unless specifically instructed to do so in that project documentation for the purposes of reference information when performing upgrades.


Table of Contents

Connector Business Rules define the connection, data result sets, and drill-back option capabilities of an external data connection. See *Application Tools* in the *Design and Reference Guide* for an example of this rule type.

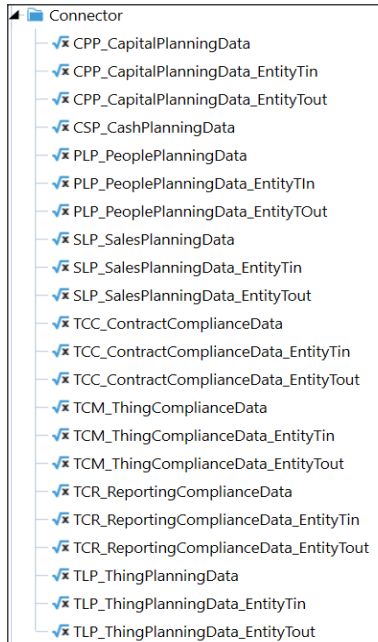

Dashboard Data Set Business Rules are used to create programmatic query results. These may be used to combine different types of data for a report, build other data queries, conditionally build data query reports or parameters, and create data series to be displayed in a Chart (Advanced) Parameter Component in a Dashboard. See *Application Tools* in the *Design and Reference Guide* for an example of this rule type.

Table of Contents

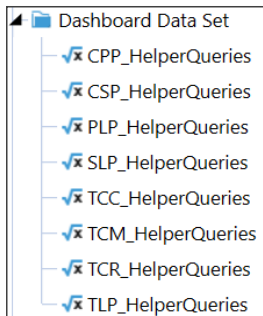

Dashboard Extender Business Rules are used to perform a variety of tasks associated with Dashboards and OneStream Solutions. These Business Rules can be thought of as multi-purpose rules that make up the majority of the code written in a OneStream Solution. They provide the core functionality and features of a OneStream Solution. They can execute tasks when GUI components are activated, perform tasks, display result messages, upload files, automate/build custom Workflows and more. See *Application Tools* in the *Design and Reference Guide* for an example of this rule type.


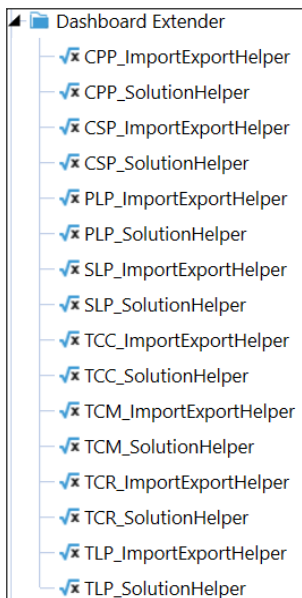



Table of Contents

Dashboard XFBR String Business Rules are used to process conditional Dashboard Parameters. These rules inspect and alter a Dashboard Parameter. See *Application Tools* in the *Design and Reference Guide* for an example of this rule type.

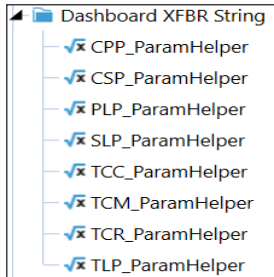

Extensibility Rules include two types of Business Rules:

1. **Extender Rules** provide simple utility functions or helper functions called as part of a Data Management Job.
2. **Event Handler Rules** are called before or after a certain operation type occurs within OneStream. See *Application Tools* in the *Design and Reference Guide* for an example of this rule type.



Each Compliance solution contains a unique **Data Management** job to execute the *Calculate Plan* functions.

Table of Contents

▲ ●● Data Management Groups

▶ ●● Capital Planning (CPP)

▶ ●● Cash Planning (CSP)

▶ ●● Contract Compliance (TCC)

▶ ●● People Planning (PLP)

▶ ●● Reporting Compliance (TCR)

▶ ●● Sales Planning (SLP)

▶ ●● Thing Compliance (TCM)


▶ ●● Thing Planning (TLP)

Home

🏠 The **People Plan** page contains the People Register, Plan Data, and Plan Analysis tabs.

Compliance enables detailed, complex, driver-based workforce compliance integration with OneStream. It binds the power and flexibility of tailored relational database tables, OneStream Dashboards, Workflow, integration with Drill Back, financial modeling, and reporting. The **Home** page contains three tabs:

The **People Register** is where register items (for example, Employees) are imported, entered, and maintained. This concept of a Register carries over into the other Compliance solutions, though the columns displayed, and data gathered as an input to the Plan Data will vary.

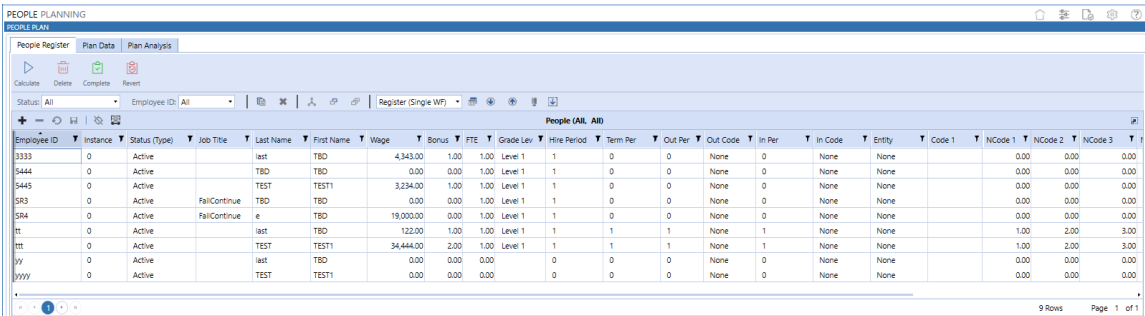

The screenshot shows the 'PEOPLE PLANNING' application with the 'People Register' tab selected. The table displays employee information with columns for Employee ID, Instance, Status (Type), Job Title, Last Name, First Name, Wage, Bonus, FTE, Grade Lev, Hire Period, Term Per, Out Per, Out Code, In Per, In Code, Entity, Code 1, NCode 1, NCode 2, and NCode 3. The data includes several rows with varying values for these fields, such as Employee ID 3333, 5444, 5445, SR3, SR4, tt, tt, yy, and yyyy.

Employee ID	Instance	Status (Type)	Job Title	Last Name	First Name	Wage	Bonus	FTE	Grade Lev	Hire Period	Term Per	Out Per	Out Code	In Per	In Code	Entity	Code 1	NCode 1	NCode 2	NCode 3
3333	0	Active		last	TBD	4,343.00	1.00	1.00	Level 1	1	0	0	None	0	None	None		0.00	0.00	0.00
5444	0	Active		TBD	TBD	0.00	0.00	1.00	Level 1	1	0	0	None	0	None	None		0.00	0.00	0.00
5445	0	Active		TEST	TEST1	3,234.00	1.00	1.00	Level 1	1	0	0	None	0	None	None		0.00	0.00	0.00
SR3	0	Active	FullContinue	TBD	TBD	0.00	0.00	1.00	Level 1	1	0	0	None	0	None	None		0.00	0.00	0.00
SR4	0	Active	FullContinue	e	TBD	19,000.00	0.00	1.00	Level 1	1	0	0	None	0	None	None		0.00	0.00	0.00
tt	0	Active		last	TBD	122.00	1.00	1.00	Level 1	1	1	1	None	1	None	None		1.00	2.00	3.00
tt	0	Active		TEST	TEST1	34,444.00	2.00	1.00	Level 1	1	1	1	None	1	None	None		1.00	2.00	3.00
yy	0	Active		last	TBD	0.00	0.00	0.00		0	0	0	None	0	None	None		0.00	0.00	0.00
yyyy	0	Active		TEST	TEST1	0.00	0.00	0.00		0	0	0	None	0	None	None		0.00	0.00	0.00

The **Plan Data** displays the results of the Plan calculations.

Table of Contents

PEOPLE PLANNING

PEOPLE PLAN


People Register Plan Data Plan Analysis

Last Calculations: 1:03:51 PM

Amount	Period	Impact Type	Activity Type	Register ID	Register Description	Activity Class	Class Description	Item Description	Entity	Account	Flow	IC	UD1	UD2	UD
0.00	6 IS	SalaryWage	SalaryWage	3333_0	Bonus \$1.00	Bonus_All	Bonus Company Wide	Target Bonus Exp	None	SalaryBonus_Exp	None	None	None	None	No
0.00	6 IS_Cum	SalaryWage	SalaryWage	3333_0	Bonus \$1.00	Bonus_All	Bonus Company Wide	Target Bonus Payable	None	SalaryBonus_Payable	None	None	None	None	No
0.00	10 IS_Cum	SalaryWage	SalaryWage	3333_0	Fica \$1.00	FicaWithLimit	Fica Based on Limit	Fica Payable (Limited)	None	SalaryALB_Payable	None	None	None	None	No
0.00	1 IS_Cum	SalaryWage	SalaryWage	3333_0	Fica \$1.00	FicaWithLimit	Fica Based on Limit	Fica Payable (Limited)	None	SalaryALB_Payable	None	None	None	None	No
0.00	9 IS_Cum	SalaryWage	SalaryWage	3333_0	Fica \$1.00	FicaWithLimit	Fica Based on Limit	Fica Payable (Limited)	None	SalaryALB_Payable	None	None	None	None	No
0.00	5 IS_Cum	SalaryWage	SalaryWage	3333_0	Fica \$1.00	FicaWithLimit	Fica Based on Limit	Fica Payable (Limited)	None	SalaryALB_Payable	None	None	None	None	No
0.00	6 IS	SalaryWage	SalaryWage	3333_0	Fica \$1.00	FicaWithLimit	Fica Based on Limit	Fica Expense (Limited)	None	SalaryFica_Exp	None	None	None	None	No
0.00	10 IS	SalaryWage	SalaryWage	3333_0	Fica \$1.00	FicaWithLimit	Fica Based on Limit	Fica Expense (Limited)	None	SalaryFica_Exp	None	None	None	None	No
0.00	7 IS_Cum	SalaryWage	SalaryWage	3333_0	Fica \$1.00	FicaWithLimit	Fica Based on Limit	Fica Payable (Limited)	None	SalaryALB_Payable	None	None	None	None	No
0.00	3 IS_Cum	SalaryWage	SalaryWage	3333_0	Fica \$1.00	FicaWithLimit	Fica Based on Limit	Fica Payable (Limited)	None	SalaryALB_Payable	None	None	None	None	No
0.00	2 IS_Cum	SalaryWage	SalaryWage	3333_0	Fica \$1.00	FicaWithLimit	Fica Based on Limit	Fica Payable (Limited)	None	SalaryALB_Payable	None	None	None	None	No
0.00	3 IS	SalaryWage	SalaryWage	3333_0	Fica \$1.00	FicaWithLimit	Fica Based on Limit	Fica Expense (Limited)	None	SalaryFica_Exp	None	None	None	None	No
0.00	5 IS	SalaryWage	SalaryWage	3333_0	Fica \$1.00	FicaWithLimit	Fica Based on Limit	Fica Expense (Limited)	None	SalaryFica_Exp	None	None	None	None	No
0.00	2 IS	SalaryWage	SalaryWage	3333_0	Fica \$1.00	FicaWithLimit	Fica Based on Limit	Fica Expense (Limited)	None	SalaryFica_Exp	None	None	None	None	No
0.00	1 IS	SalaryWage	SalaryWage	3333_0	Fica \$1.00	FicaWithLimit	Fica Based on Limit	Fica Expense (Limited)	None	SalaryFica_Exp	None	None	None	None	No
0.00	12 IS	SalaryWage	SalaryWage	3333_0	Fica \$1.00	FicaWithLimit	Fica Based on Limit	Fica Expense (Limited)	None	SalaryFica_Exp	None	None	None	None	No
0.00	7 IS	SalaryWage	SalaryWage	3333_0	Fica \$1.00	FicaWithLimit	Fica Based on Limit	Fica Expense (Limited)	None	SalaryFica_Exp	None	None	None	None	No
0.00	11 IS	SalaryWage	SalaryWage	3333_0	Fica \$1.00	FicaWithLimit	Fica Based on Limit	Fica Expense (Limited)	None	SalaryFica_Exp	None	None	None	None	No
0.00	9 IS	SalaryWage	SalaryWage	3333_0	Fica \$1.00	FicaWithLimit	Fica Based on Limit	Fica Expense (Limited)	None	SalaryFica_Exp	None	None	None	None	No
0.00	4 IS_Cum	SalaryWage	SalaryWage	3333_0	Fica \$1.00	FicaWithLimit	Fica Based on Limit	Fica Expense (Limited)	None	SalaryALB_Payable	None	None	None	None	No

196 Rows Page 1 of 4

The **Plan Analysis** displays drillable reports on the Plan data.

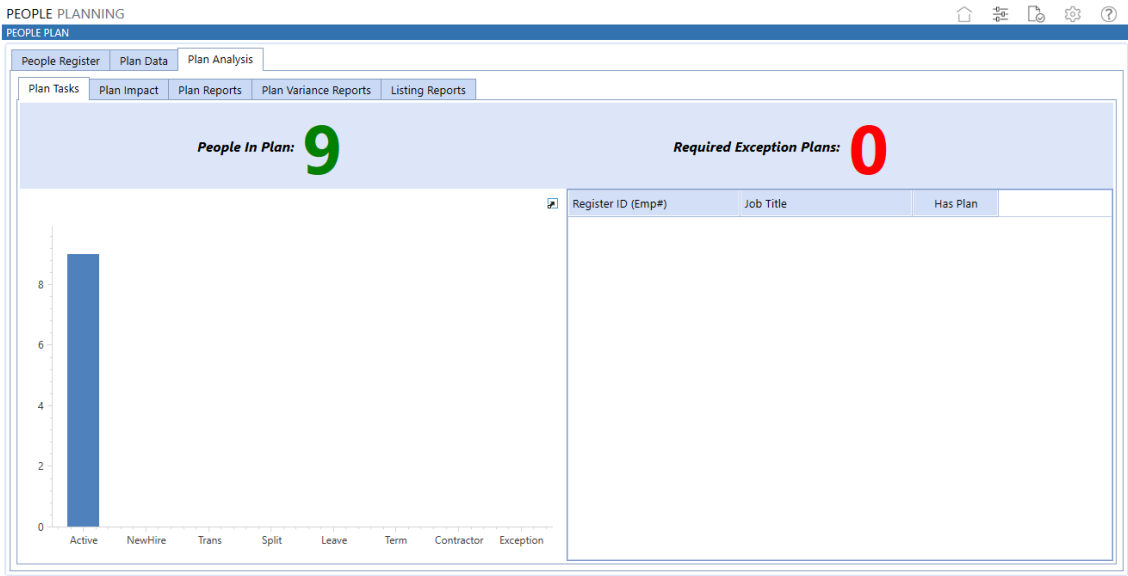

NOTE: People Register, Plan Data, and Plan Analysis are called **Register**, **Data**, and **Analysis** in other Compliance solutions.

People Register

The **People Register** is integrated into the end user Workflow process. End users will use this page to input new employee information (for example, New Hires) and to maintain existing employee information (for example, Transfers / Leave). In addition, this page provides users with the ability to run plan calculations, review calculation results, and then complete the workflow. Upon completion, this will load summarized plan data in to the analytic planning model.

Calculate a Plan

Calculate runs items marked as Enabled in the Execution List and then runs the related Calculation Plans and Allocation Methods. Results are displayed in **Plan Data** tab. Only one user can initiate a Calculation Plan at a time within the same workflow profile.

NOTE: When running the Calculate Plan from this button, the calculations are run as a Data Management job. This Data Management job is run on the general server and not on the Data Management server because the call to start the job is not coming from the web interface.

Delete a Plan

Delete removes the results from the **Plan Data** tab.

Complete a Workflow

Complete calculates the People Plan (if the Global Option is enabled) and autoload the assigned Workflows. If the Workflow load is successful, then the Workflow running the People Plan Dashboard is marked as complete.

Revert a Workflow

Revert reopens the Workflow running the People Plan Dashboard and resets the import Workflows assigned to auto load.

People Register Taskbar



Field	Description
Status	Displays only the selected Status (Type).
Employee ID	Displays only the selected Employee ID. When this filter is used, additional instances of the same Employee ID can be entered. This is useful for entering multiple transfers for the same employee.
Open Copy Register (All)	Copies the entire register plan selected in the combo box to the register currently specified in the POV (Time/Scenario).

Table of Contents

Field	Description
Open Delete Register Plan	Deletes the exception plan for the current record in the grid or the entire register.
Open Exception Calc Plan	Allows users to enter an exception plan for the selected register. Exception plans are for people that have an Exception Status (Type) and act as additional plan items for people that have an assigned Status.
Open Copy Exception Calc Plan	Copies an existing exception plan to the selected register item in the grid.
Open Copy Exception Calc Plan (One-To-Many)	Copies an existing exception plan to multiple plans based on specified criteria.
Excel Template Selector	Downloads the Excel template selected in the combo box to the left (Single WF, Multi WF, Exception Plan).

Table of Contents

Field	Description
Download Register XLXS Import Template	<p>This downloads the Excel Template selected in the Excel Template Selector.</p> <p>For additional information about this field, see Appendix F: Excel Templates.</p>
Export Register	<p>Exports Register data out to a CSV file to be edited in Excel and then re-imported. Note that before saving as an Excel file to be re-imported, an Excel Named Range that starts with the letters “xft” must be added to this file for the range of cells that start with the word “Application” (usually in the A5 cell) and all the way right to cover relevant columns and down to cover the relevant rows.</p>
Import Register Items	<p>Allows the user to browse to and upload a register template. Note that this template must include an Excel Named Range.</p>
Import Register Data Using A Connector	<p>Calls a customer-specific Connector to pull data into the People Register. Update the ImportRegisterConnector Function in the PLP_SolutionHelper Dashboard Extender Business Rule in order to import the register. By default, this button will not process anything until the function is updated. Contact OneStream Support if assistance is needed and arrangements can be made.</p>

Table of Contents

Field	Description
Export Entire Register	Downloads Registers for all Workflows into one file. This only displays for Administrators and users in the Manage Calculation Definition Security Group.

Calculation Definition

The **Calculation Definitions** page contains Global Drivers, Allocation Methods, Calculation Plans, and Execution Lists.

The Calculation Definition page is the interface for defining the calculations against the Register. The OneStream Compliance Engine uses a methodology similar to a general ledger sub-system distribution (for example, Accounts Payable):

- It generates accounting distribution based on the line item calculations defined in the **Allocation Methods** page. Think of these as adjustments that can be made to the target financial model. Allocation Methods are not executed directly. One or more Allocation Methods are assigned to a Calculation Plan first, which defines whether the calculation should be executed.
- A **Calculation Plan** provides the ability to limit the execution of an Allocation Plan to specific time periods within the plan, specific items in the registers (such as Employees, Assets, and Contracts) and by any field value defined in the register table.
- Data calculation is ultimately controlled by an **Execution List** which simply contains the list of defined Calculation Plans and the set of filters that link the plans to specific Workflows, Scenarios, and register status values. For example, a Calculation Plan created for new hires should only be applied to employees with a status of *New Hires*. Execution Plans provide the mechanism to implement this restriction.
- In essence, an Execution List runs Calculation Plans conditionally against Register items for various time periods and generates adjustment data based on the related Allocation Methods.

Global Drivers

Global Drivers are customizable variables used in Compliance. Variables entered into this grid appear as options in the Substitution Variable combo boxes on the Allocation Methods and Calculation Plans pages. These values can be text, numbers, XFBR String, or XFGetCells and can be replaced in expressions by referring to the Global Driver name similar to this: |Overtime|

PEOPLE PLANNING

CALCULATION DEFINITIONS

☒ Global Drivers ☐ Allocation Methods ☐ Calculation Plans ☐ Execution List

Name	Value
FicaLimit	45000
FicaRate	.02
MeritIncrease	.05
WageWhatif	1

4 Rows Page 1 of 1

Allocation Methods

Allocation Methods are pre-defined calculated accounting distributions. The lower part of the grid is where Allocation details (*accounting distributions*) are added. The Weight/Value/Exp field allows the entry of anything from simple values to complex expressions based on the values in the register. Substitution Variables can be selected from the drop-down box as well.

Once selected, the variable is added to the selection box on the right-hand side. Copy the variable by highlighting it and pressing *Ctrl+C*. These variables can then be used in

Calculation Definition

expression fields. See [Appendix B: Substitution Variables](#) for a detailed list of substitution variables. Each Allocation Method contains the following fields:

Field	Description
Method ID	A unique identifier for the Allocation.
Name	This contains the Allocation name. This field is linked to the detail grid on the Calculation Plans page.
Description	This contains the Allocation description. This field is displayed as the Plan Data page's Class Description.
Value Type	Select the calculation method that the allocation will use.
Fixed Value	Uses a static amount for the Allocation accounts.
Expression	Specifies that the value for the allocation account will be calculated using an expression defined in the in the Weight/Val/Exp field.
Expression (ZP)	This method will suppress zeroes for Activity (<i>non-Cumulative</i>) type accounts during Expression calculation.
Wage Percentage (called Value Percentage in all other solutions)	Specifies that the value for the allocation account will be calculated by multiplying the person's wage by the value entered in the Weight/Val/Exp field.

NOTE: For additional value types that are available for other Compliance solutions, see [Appendix C: Calculations \(Allocation Methods\)](#).

Allocation Method Detail

Each Allocation Method contains the following fields:

Field	Description
Sequence	Numeric field that orders the allocation accounts.
Description	Text field that holds text description. This description is displayed on the People Plan's Item Description field.
Weight/Value/Exp	This field contains the amount or method used to calculate the allocation amount. When using Wage Percentage, enter a decimal value to multiply by each person's wages. If a Fixed Value is used, enter the full amount for the allocation in each account. If an Expression is used, enter the expression in this field.
Dimensions (Account - UD8)	These fields hold the POV for the allocation / journal. Populate each Dimension field with a valid member.

Calculation Definition

PEOPLE PLANNING

CALCULATION DEFINITIONS

☐ Global Drivers ☒ Allocation Methods ☐ Calculation Plans ☐ Execution List

|RegisterID| Ctrl-C to Copy: |RegisterID|

Allocation Methods

Method ID	Name	Description	Value Type
Bonus_All	Company Wide Bonus	Bonus Company Wide	Wage Percentage
Contractor	Contractor Expense	Contractor Expense	Wage Percentage
FicaWithLimit	Fica With Limit	Fica Based on Limit	Expression
MeritRaise_All	Company Wide Merit Raise	Merit Raise Company Wide	Wage Percentage
NH_BenFixed_USD	New Hire Benefits Fixed USD	New Hire Benefits (F) USD	Fixed Value
NH_SalG1_USD	New Hire Salary Grade 1	New Hire Grade 1	Fixed Value
NH_SalG2_USD	New Hire Salary Grade 2	New Hire Grade 2	Fixed Value
NH_SalG3_USD	New Hire Salary Grade 3	New Hire Grade 3	Fixed Value
NH_SalG4_USD	New Hire Salary Grade 4	New Hire Grade 4	Fixed Value
NH_SalG5_USD	New Hire Salary Grade 5	New Hire Grade 5	Fixed Value
SalBenFixed_BRL	Benefit Fixed BRL	Benefit (F) BRL	Fixed Value
SalBenFixed_EUR	Benefit Fixed EUR	Benefit (F) EUR	Fixed Value

22 Rows Page 1 of 1

Allocation Method Detail (Company Wide Bonus)

Sequence	Description	Weight/Value/Exp
10	Target Bonus Exp	Bonus
10	Target Bonus Payable	- Bonus

2 Rows Page 1 of 1

Calculation Plans

Calculation Plans Allocation Method groups and conditional execution statements used to define when the Allocation Methods should run. Each Calculation Plan contains the following fields:

Field	Description
Sequence	Numeric value for ordering items in the Calculation Plan.

Calculation Definition

Field	Description
Allocation Method	This lists all available Allocation Methods. Allocations are journal templates and are created/defined on the Allocation Methods page.
Description	The value entered in this field is displayed on the People Plan's Register Description field.
Weight/Count/Exp	Enter the value by which to multiply by. This can be a percentage, expression, number, etc.
Period Divisor/Exp	This defines the number of periods over which the allocation results should spread. For example, adding a merit increase of 5% on current wages means the resulting value is applied to each month in the plan and needs to be divided by 12.
Period Filter	This defines the periods for which the calculation plan will execute. Valid entries include a static list of periods (3,6,9,12), a range of periods (1-7), or an expression (1- PPerCount).

Calculation Definition

Field	Description
Conditional Execution Statement	This controls under what conditions the plan executes. For example, if the conditional field contains <code> Code1 = 'EUR'</code> then for the person being processed, the rule would only run if the value in <i>Code1</i> was equal to <i>EUR</i> . Full expressions can be processed (<i>IF, IIF, and, or, etc</i>).
Override Fields	The Dimension Override Fields are optional and override the default allocation POV defined in the Allocation Method.

PEOPLE PLANNING

CALCULATION DEFINITIONS

Global Drivers Allocation Methods **Calculation Plans** Execution List

|RegisterID| Ctrl-C to Copy: |RegisterID|

Calculation Plans

Plan ID	Description
Active_All	Active All Employees
Active_BRL	Active BRL Employees
Active_EUR	Active EUR Employees
Active_GBP	Active GBP Employees
Active_Oth	Active Other Employees
Active_USD	Active USD Employees
Contractor	Contract Workers
Leave_USD	Leave Employees USD (Unpaid)
NewHire_USD	New Hire USD Employees
Split_USD	Split Employees USD (Department)
Transfer_USD	Transfer Employees USD (Department)
XFRB_Custom_Functions	Custom Function Examples

12 Rows Page 1 of 1

Calculation Plan (Active_All, Active All Employees)

Sequence	Allocation Method	Description	Weight/Count/Exp	Period Divisor/Exp	Period Filter	Conditional Execution Statement	Entity Override	Flow On
30	Fica With Limit	Fica	1	12	StartPer - EndPer	RegisterIDInstance = 0		
20	Company Wide Bonus	Bonus	1	1	6	CalcPer = 6		
10	Company Wide Merit Raise	Merit Increase	1	12	9	CalcPer = 9		

3 Rows Page 1 of 1

Execution List

The **Execution List** page is used to assign Calculation Plans to Status Filters. This determines with what Scenario / Workflow combinations the Calculation Plans are used. Each Execution List contains the following fields:

Field	Description
WF Profile of PlanGlobal	Select a single Workflow or <i>PlanGlobal</i> . If <i>PlanGlobal</i> is selected, then the Calculation Plan runs for all Workflows, otherwise it only runs for the specified Workflow Profile.
Scenario Type Filter	Select a specific Scenario Type (<i>Actual, Budget, Flash, etc.</i>) or <i>All</i> . If <i>All</i> is selected, then the Calculation Plan runs for all Scenarios, otherwise it only runs for the specified Scenario Type.
Status Filter	Select the Status (<i>types</i>). The list of available types is defined on the Global Options page. Status Types filter the people configured in the register. The specified Calculation Plan will only execute for people in the register with the selected Status Type.
Calculation Plan	Select a Calculation Plan from the existing plans configured on the Calculation Definition page.
Enabled	A True / False flag identifying whether the Calculation Plan is turned on or off.

Calculation Definition

PEOPLE PLANNING

CALCULATION DEFINITIONS




☐ Global Drivers ☐ Allocation Methods ☐ Calculation Plans ☒ Execution List

Execution List

WF Profile or PlanGlobal	Scenario Type Filter	Status Filter	Calculation Plan	Enabled	Sequence	
PlanGlobal (Any Workflow)	All	Active	Active_BRL (Active BRL Employees)	<input type="checkbox"/>	10	
PlanGlobal (Any Workflow)	All	Active	Active_EUR (Active EUR Employees)	<input type="checkbox"/>	10	
PlanGlobal (Any Workflow)	All	Active	Active_GBP (Active GBP Employees)	<input type="checkbox"/>	10	
PlanGlobal (Any Workflow)	All	Active	Active_Oth (Active Other Employees)	<input type="checkbox"/>	10	
PlanGlobal (Any Workflow)	All	Term	Active_USD (Active USD Employees)	<input type="checkbox"/>	10	
PlanGlobal (Any Workflow)	All	Active	Active_USD (Active USD Employees)	<input checked="" type="checkbox"/>	10	
PlanGlobal (Any Workflow)	All	Contractor	Contractor (Contract Workers)	<input type="checkbox"/>	10	
PlanGlobal (Any Workflow)	All	Leave	Leave_USD (Leave Employees USD (Unpaid))	<input type="checkbox"/>	10	
PlanGlobal (Any Workflow)	All	NewHire	NewHire_USD (New Hire USD Employees)	<input type="checkbox"/>	10	
PlanGlobal (Any Workflow)	All	Split	Split_USD (Split Employees USD (Department))	<input type="checkbox"/>	10	
PlanGlobal (Any Workflow)	All	Trans	Transfer_USD (Transfer Employees USD (Department))	<input type="checkbox"/>	10	
PlanGlobal (Any Workflow)	All	Active	Active_All (Active All Employees)	<input checked="" type="checkbox"/>	15	
PlanGlobal (Any Workflow)	All	All	XFBR Custom Functions (Custom Function Examples)	<input checked="" type="checkbox"/>	20	

13 Rows Page 1 of 1

Import Calculation Definitions with an Excel Template

1. Click  to download the Excel template.
2. Click  to import the file.
3. Click  to download related existing data to a CSV file format for editing in Excel.

IMPORTANT: Before importing, you must add a Named Range beginning with XFT.

Audit

The **Audit** page is a 3-tabbed Dashboard that reports audited activity through the Audit Logs, Audit Report, and Audit Files tabs. This section is available only to members of the **Manage Calculation Definition** Security Group.

The Compliance Audit feature includes:


- *XFW_TCR_AuditLog* database table (Audit Log database tables will include the solution's unique three letter identifier in the name) to track all Solution Audit Logs.
- Business Rule functions record Solution Audit Log activities for Register data modifications (inserts, deletes and modifications), Excel data file imports, modifications to Allocations, modifications to Calculation Plans and a defined set of other changes.
- Source Excel data files are archived in the *XFW_TCR_AuditLog* database table upon upload for detailed review of the Imports. This helps streamline Audit Log activities by showing a file as a single import entry in the log while still providing the whole file for review of all imported data. The audit reporting will reference the user's Point of View at the time spreadsheet data is imported and include a copy of the spreadsheet in the audit log. It is important to remember that spreadsheets can import data for multiple Points of View. Therefore, the attached spreadsheet file should be reviewed to analyze the detailed Points of View that may have been impacted by a spreadsheet import.
- Audit Dashboard provides analysis and reporting to review Solution Audit Log activities. The Dashboard reporting runs for the specified range of dates. The

Audit

default range of dates is 30 days.

Start Date: 01/01/2019

End Date: 07/31/2020


Refresh

Audit Logs

Audit Logs displays a grid view for filtered analysis the audited Register activities for the selected range of dates.

PEOPLE PLANNING

AUDIT


Audit Logs

Audit Report






Audit Files

Start Date: 01/01/2019

End Date: 09/03/2020


Refresh

Drag a column header and drop it here to group by that column

Audit Group	Object	Action Type	Audit Info	FileName	User	Time (UTC)
DataEntry	CalcPlanDetail	Delete	CalcPlanDetailID = 5190fab3-748f-47fb-8b28-15fda71d4a46;FKClassID = FicaWithLimit;Description = test;WeightOrCount = 1;PeriodDivisor = 12;PeriodFilter = [PStartPer]-[PEndPer];Condition = ;EntityOverride = ;COverride = ;UD1Override = ;UD2Override = ;UD3Override = ;UD4Override = ;UD5Override = ;UD6Override = ;UD7Override = ;UD8Override = ;Sequence = 10;FKCalcPlanID = NewHire_USD;FKWFProfileName = PlanTemplate;FKWFScenarioName = PlanTemplate;KWFTTimeName = PlanTemplate;FlowOverride =	Unknown		8/14/2020 4:46:18 PM
DataEntry	CalcPlanDetail	Insert	CalcPlanDetailID = 5190fab3-748f-47fb-8b28-15fda71d4a46;FKClassID = FicaWithLimit;Description = test;WeightOrCount = 1;PeriodDivisor = 12;PeriodFilter = [PStartPer]-[PEndPer];Condition = ;EntityOverride = ;COverride = ;UD1Override = ;UD2Override = ;UD3Override = ;UD4Override = ;UD5Override = ;UD6Override = ;UD7Override = ;UD8Override = ;Sequence = 10;FKCalcPlanID = NewHire_USD;FKWFProfileName = PlanTemplate;KWFTTimeName = PlanTemplate;FlowOverride =	Unknown		8/14/2020 4:46:10 PM
DataEntry	Register	Insert	RegisterID = 5444;RegisterIDistance = 0;WFProfileName = Houston People Plan;People Planning;WFScenarioName = Actual;WFTimeName = 2019M1;JobTitle = ;LastName = TBD;FirstName = TBD;Wage = 0;Bonus = 0;FTE = 1;GradeLevel = 1;Status = Active;HireDate = 8/14/2020 4:17:49 PM;HirePeriod = 1;TermDate = 1/1/1900 12:00:00 AM;TermPeriod = 0;BirthDate = 1/1/1900 12:00:00 AM;OutPeriod = 0;OutCode = None;InPeriod = 0;InCode = None;Entity = None;Code1 = ;Code2 = ;Code3 = ;Code4 = ;Code5 = ;Code6 = ;Code7 = ;Code8 = ;Code9 = ;Code10 = ;Code11 = ;Code12 = ;NCode1 = 0;NCode2 = 0;NCode3 = 0;NCode4 = 0;NCode5 = 0;NCode6 = 0;NCode7 = 0;NCode8 = 0;DCode1 = 1/1/1900 12:00:00 AM;DCode2 = 1/1/1900 12:00:00 AM;DCode3 = 1/1/1900 12:00:00 AM;DCode4 = 1/1/1900 12:00:00 AM;Annot1 = ;Annot2 =	Unknown		8/14/2020 4:18:49 PM
DataEntry	Register	Update	RegisterID = [SR4];RegisterIDistance = [0];WFProfileName = [Houston People Plan;People Planning;WFScenarioName = Actual;WFTimeName = [2019M1];JobTitle = [FailContinue];LastName = [TBD] To --> e;FirstName = [TBD];Wage = [0.000000000] To --> 19000;Bonus = [0.000000000];FTE = [1.000000000];GradeLevel = [1];Status = [Active];HireDate = [8/14/2020 12:00:00 AM];HirePeriod = [1];TermDate = [1/1/1900 12:00:00 AM];TermPeriod = [0];BirthDate = [1/1/1900 12:00:00 AM];OutPeriod = [0];OutCode = [None];InPeriod = [0];InCode = [None];Entity = [None];Code1 = [0];Code2 = [0];Code3 = [0];Code4 = [0];Code5 = [0];Code6 = [0];Code7 = [0];Code8 = [0];Code9 = [0];Code10 = [0];Code11 = [0];Code12 = [0];NCode1 = [0.000000000];NCode2 = [0.000000000];NCode3 = [0.000000000];NCode4 = [0.000000000];NCode5 = [0.000000000];NCode6 = [0.000000000];NCode7 = [0.000000000];NCode8 = [0.000000000];DCode1 = [1/1/1900 12:00:00 AM];DCode2 = [1/1/1900 12:00:00 AM];DCode3 = [1/1/1900 12:00:00 AM];DCode4 = [1/1/1900 12:00:00 AM];Annot1 = [0];Annot2 = [0]	Unknown		8/14/2020 4:02:17 PM
DataEntry	Register	Insert	RegisterID = SR4;RegisterIDistance = 0;WFProfileName = Houston People Plan;People Planning;WFScenarioName = Actual;WFTimeName = 2019M1;JobTitle = FailContinue;LastName = TBD;FirstName = TBD;Wage = 0;Bonus = 0;FTE = 1;GradeLevel = 1;Status = Active;HireDate = 8/14/2020 3:57:02 PM;HirePeriod = 1;TermDate = 1/1/1900 12:00:00 AM;TermPeriod = 0;BirthDate = 1/1/1900 12:00:00 AM;OutPeriod = 0;OutCode = None;InPeriod = 0;InCode = None;Entity = None;Code1 = ;Code2 = ;Code3 = ;Code4 = ;Code5 = ;Code6 = ;Code7 = ;Code8 = ;Code9 = ;Code10 = ;Code11 = ;Code12 = ;NCode1 = 0;NCode2 = 0;NCode3 = 0;NCode4 = 0;NCode5 = 0;NCode6 = 0;NCode7 = 0;NCode8 = 0;DCode1 = 1/1/1900 12:00:00 AM;DCode2 = 1/1/1900 12:00:00 AM;DCode3 = 1/1/1900 12:00:00 AM;DCode4 = 1/1/1900 12:00:00 AM;Annot1 = ;Annot2 =	Unknown		8/14/2020 3:57:41 PM
			RegisterID = SR3;RegisterIDistance = 0;WFProfileName = Houston People Plan;People Planning;WFScenarioName = Actual;WFTimeName = 2019M1;JobTitle = FailContinue;LastName = TBD;FirstName = TBD;Wage = 0;Bonus = 0;FTE = 1;GradeLevel = 1;Status = Active;HireDate = 8/14/2020 3:56:17 PM;HirePeriod = 1;TermDate = 1/1/1900 12:00:00			

Audit Report

Audit Report provides a formatted report to review the selected range of dates.

PEOPLE PLANNING

AUDIT

Audit Logs Audit Report Audit Files

Start Date: 01/01/2019 End Date: 09/03/2020 Refresh

Audit Log Report

Navigation
Enter text to search...
Document Map Pages Search Results
Document
Action Types
DataEntry
ImportFile

Audit Log Report

Start Date: 01/01/2019
End Date: 09/03/2020

Audit Group			Data Entry
Action Type:	Audit Object:	Audit Info:	Audit File Name: Audit User: Audit Time (UTC):
Delete	CalcPlanDetail	CalcPlanDetailID=6190fab3-748f-47fb-B628-19fd471d4a46FKClassID=FiscalWithLimitDescription=test;WeightCount=1PeriodDivisor=12PeriodFilter=[PStarPer];IPendPerCondition=EntityOverride=JCOverride=UD01Override=UD20Override=UD30Override=UD40Override=UD50Override=UD60Override=UD70Override=UD80Override=Sequence=10.FKCalcPlanID=NewHire_USD.FKWFFProfileName=PlanTemplate.FKWFFScenarioName=PlanTemplate.FKWFTTimeName=PlanTemplate.FlowOverride=	Unknown [User Icon] 08/14/2020 16:46
Insert	CalcPlanDetail	CalcPlanDetailID=6190fab3-748f-47fb-B628-19fd471d4a46FKClassID=FiscalWithLimitDescription=test;WeightCount=1PeriodDivisor=12PeriodFilter=[PStarPer];IPendPerCondition=EntityOverride=JCOOveride=UD01Override=UD20Override=UD30Override=UD40Override=UD50Override=UD60Override=UD70Override=UD80Override=Sequence=10.FKCalcPlanID=NewHire_USD.FKWFFProfileName=PlanTemplate.FKWFFScenarioName=PlanTemplate.FKWFTTimeName=PlanTemplate.FlowOverride=	Unknown [User Icon] 08/14/2020 16:46
Insert	Register	RegisterID=5444RegisterDistance=0.WFProfileName=Houston People Plan.PeoplePlanning.WFScenarioName=ActualWFTimeName=[2019M1].JobTitle=LastName=TBD.FirstName=TBD.Wage=0Bonus=0OTE=1GradeLevel=1Status=Active.HireDate=8/14/20204:17:49PM.HirePeriod=1TermDate=1/1/190012:00:00AM.TerminationDate=1/1/190012:00:00AM.OutPeriod=0.OutCode=None.InPeriod=0.InCode=None.Entity=None.Code1=Code2=Code3=Code4=Code5=Code6=Code7=Code8=Code9=Code10=Code11=Code12=INCode1=0INCode2=0NCode1=0NCode2=0NCode3=0NCode4=0NCode5=0NCode6=0NCode7=0NCode8=0DCodet=1/1/190012:00:00AM.DCoded=1/1/190012:00:00AM.DCods=1/1/190012:00:00AM.DCoded=1/1/190012:00:00AM.Annot1=[Annot2]=[Unknown [User Icon] 08/14/2020 16:18
Update	Register	RegisterID=[SR4].RegisterDistance=0.WFProfileName=Houston People Plan.PeoplePlanning.WFScenarioName=[ActualWFTimeName=[2019M1].JobTitle=IfFailContinue).LastName=[TBD].To-->.FirstName=[TBD].Wage=[0.000000000].To-->[1900].Bonus=[0.000000000].OTE=[0.000000000].GradeLevel=[1].Status=[Active].HireDate=[8/14/202012:00:00AM].HirePeriod=[1].TermDate=[1/1/190012:00:00AM].TerminationDate=[1/1/190012:00:00AM].OutPeriod=[0].OutCode=[None].InPeriod=[0].InCode=[None].Entity=[None].Code1=[0].Code2=[0].Code3=[0].Code4=[0].Code5=[0].Code6=[0].Code7=[0].Code8=[0].Code9=[0].Code10=[0].Code11=[0].Code12=[0].NCode1=[0.000000000].NCode2=[0.000000000].NCode3=[0.000000000].NCode4=[0.000000000].NCode5=[0.000000000].NCode6=[0.000000000].NCode7=[0.000000000].NCode8=[0.000000000].NCode9=[0.000000000].NCode10=[0.000000000].NCode11=[0.000000000].NCode12=[0.000000000].DCodet=[1/1/190012:00:00AM].DCoded=[1/1/190012:00:00AM].DCods=[1/1/190012:00:00AM].DCoded=[1/1/190012:00:00AM].Annot1=[Annot2]=[Unknown [User Icon] 08/14/2020 16:02
Insert	Register	RegisterID=SR4.RegisterDistance=0.WFProfileName=Houston People Plan.PeoplePlanning.WFScenarioName=ActualWFTimeName=[2019M1].JobTitle=IfFailContinue.LasName=TBD.FirstName=TBD.Wage=	Unknown [User Icon] 08/14/2020 15:57

Page: 1 / 4 100%

Audit Files

Audit Files contains a grid view of imported Excel files for the selected range of dates.

View imported files in Excel by selecting the file entry and clicking **View**.

PEOPLE PLANNING

AUDIT

Audit Logs

Audit Report

Audit Files

Start Date: 01/01/2019

End Date: 09/03/2020

Refresh

Download

Drag a column header and drop it here to group by that column

AuditFileName	Workflow	Table	User	Time (UTC)
Numeric.xlsx	WP#Houston People Plan.People Plan	XFW_PLP_Register, Load Method: Merge; XFW_PLP_Regis	Frank Buettner	8/14/2020 3:30:11 PM
Numeric.xlsx	WP#Houston People Plan.People Plan	XFW_PLP_Register, Load Method: Merge; XFW_PLP_Regis	Frank Buettner	8/14/2020 3:28:54 PM
NoNumeric.xlsx	WP#Houston People Plan.People Plan	XFW_PLP_Register, Load Method: Merge	Frank Buettner	8/14/2020 3:18:58 PM

Settings

The **Settings** page is an Administrator-only page containing Global Options, Activity Type, Account, Control List, Status List, Register Field, Plan Period, and Mass Update tabs as well as Uninstall options to specify key properties for Compliance administration.

Global Options

The **Global Options** page should be the first page accessed during the initial setup and configuration of Compliance.

NOTE: All global option settings are retained during solution upgrades.

PEOPLE PLANNING

SETTINGS

- Global Options
- Activity Types
- Accounts
- Control Lists
- Status List
- Register Field Types
- Register Field Order
- Register Field List
- Plan Periods
- Mass Update
- Uninstall

Security Group [View Employee Name]:

Security Group [Manage Calculation Definition]:

Default Plan Start Period:

Default Plan End Period:

Calculate Plan Before Complete Workflow:

Workflow Profile Suffix [Auto Load]:

Workflow Profile [Central Register Mgmt]:

Workflow Profile [Source Connector Criteria]:

Scenario [Source Connector Criteria]:

Time [Source Connector Criteria]:

Parallel Batch Size [Lower = More Parallelism]:

Use Parallel Save:

Save

Security Group [View Employee Name]

This group is granted access to the names listed in the Employee Register.

Security Group [Manage Calculation Definition]

This group is granted access to the Calculation Definitions page and are the only users who can see the Calculation Definitions button.

NOTE: Employee Name and Calculation Definitions are only visible to users in the specified Security Group.

Default Plan Start Period

The starting period included in the Plan Calculation (1-120).

Default Plan End Period

The last period in the Plan Calculation. The maximum number of periods is different by solution but can be modified. [Contact OneStream Support](#) for assistance.

Calculate Before Complete Workflow

Select **Yes** if the plan is automatically calculated before the Workflow is complete.

NOTE: When using Parallel processing in Compliance solutions, turn off this setting if the calculations are long running/intensive. With the multi-threading option, this can be a problem as the calculation in this case is serial and not a Data Management job.

Workflow Profile Suffix [Auto Load]

The name of the Import Base Input.

Workflow Profile [Central Register Mgmt]

The Workflow with central control.

Workflow Profile [Source Connector Criteria]

Determines which Workflow Profile Base Input is used for loading Plan Data to Cube.

Scenario [Source Connector Criteria]

Contains all Scenarios used in the source Connector to pull data from the calculated People Plan.

Time [Source Connector Criteria]

Contains all time periods used in the source Connector to pull data from the calculated People Plan.

Parallel Batch Size [Lower = More Parallelism]

This is the number of records to be processed in each parallel batch. The calculation takes the total number of records to be processed and puts them into batches based on the Parallel Batch Size. Smaller numbers selected in this option increase the number of calculations that are run in parallel as there are more batches that can be processed.

Use Parallel Save

Select **Yes** to direct **Calculate Plan** to process the People Plan calculations in batches. This option improves the calculation process.

Global Options for Compliance

The following Global Options apply only to Compliance.

Enable Journal Loading

- Select **Yes** to create unposted Journals in the current Workflow for every row in resulting Data tab on the Data page.
- Select **No** to follow the default setup.

NOTE: If creating journals for these adjustments instead of through the OneStream Stage as imported data, there is no opportunity to drill back to Reporting Compliance from Cube-based reporting as is available otherwise.

Top Entity for Journals

Enter the name for the Top Parent Entity to be used by the Journal creation process if Enable Journal Loading is set to Yes. Knowing a Parent Entity is necessary if posting Journals to Consolidation members other than Local or a specific currency. This process will look at the child Entity being referenced in the Data tab and based on the Top Entity for Journals, get its Parent and see if they are a descendent of this noted Entity.

In Text1 for the Workflow Profile being executed is where the Administrator can specify an override to this Parent Entity.

Journal Cons Member

Text box is used to enter the default Consolidation member to post journals to, including currencies (typically Local).

If posting to Consolidation members of Translated, OwnerPreAdj or OwnerPostAdj, the posting process needs a Parent Entity to be entered.

Administrators can enter an override "Consolidation Member for Journals" in a Workflow Profile Member Property in the *Text2* field. This will be used to override the main global option here in *Journal Cons Member*.

NOTE: This journal process cannot be used with extended Entity dimensions if posting to Consolidation members other than Local or a specified currency since Parent Entity is required. At this time, this configuration is not supported.

Activity Types

Activity Types are mostly for report grouping and can be mapped to the Stage for Transformation Rule purposes. The Activity Types list displays the following information for each Activity:

- **Activity Type:** Freeform text field to give the type a short name.
- **Description:** Optional freeform text field containing additional activity information.

Settings

PEOPLE PLANNING

SETTINGS

Global Options	Activity Types	
Activity Types	Activity Type	Description
Accounts	[None]	None
Control Lists	Commission	Commission
Status List	Consulting Revenue	Consulting Revenue
Register Field Types	HourlyWage	Hourly Wage
Register Field Order	SalaryWage	Salary Wage
Register Field List	Travel	Travel Expense
Plan Periods		
Mass Update		
Uninstall		

6 Rows Page 1 of 1

TIP: Click ▼ to filter and sort a column.

Accounts

The **Accounts** list displays the list of accounts calculated in Reporting Compliance and contains the following information for each account:

- **Name:** Freeform text field to give account a name.
- **Description:** Optional freeform text field containing additional information.
- **Activity Type:** Drop-down list containing the Activity types (Commission, Consulting Revenue, Hourly Wage, Salary Wage, Travel).
- **Impact Type:** Drop-down list containing the impact types [IS (*Activity*), IS (*Cumulative*), BS (*Activity*), BS (*Cumulative*), Stat (*Activity*), Stat (*Cumulative*)]. Impact Types have a direct impact on how Plan Data is calculated over time.

Accounts can be entered manually or imported using an Excel template. Click to download the Excel template. Once the template is updated, click  to import the file.

Settings

PEOPLE PLANNING

SETTINGS

Global Options
Activity Types
Accounts
Control Lists
Status List
Register Field Types
Register Field Order
Register Field List
Plan Periods
Mass Update
Uninstall

Accounts

Account	Description	Activity Type	Impact Type
[None]	None	[None]	IS (Activity)
Hourly_Exp	Hourly Wage Expense	HourlyWage	IS (Activity)
Hourly_Payable	Hourly Wage Liability	HourlyWage	BS (Cumulative)
Hourly401K_Exp	Hourly 401K Match Expense	HourlyWage	IS (Activity)
HourlyALB_Payable	Hourly ALB Liability	HourlyWage	BS (Cumulative)
HourlyFica_Exp	Hourly Fica Tax Expense	HourlyWage	IS (Activity)
HourlyFuta_Exp	Hourly Futa Tax Expense	HourlyWage	IS (Activity)
HourlyMerit	Hourly Merit Increase	HourlyWage	IS (Activity)
HourlyMerit_Payable	Hourly Merit Liability	HourlyWage	BS (Cumulative)
HourlyVacation_Exp	Hourly Vacation Pay Expense	HourlyWage	IS (Activity)
Contractor_Exp	Contractor Expense	SalaryWage	IS (Activity)
Contractor_Payable	Contractor Liability	SalaryWage	BS (Cumulative)
Salary_Exp	Salary Expense	SalaryWage	IS (Activity)
Salary_Payable	Salary Liability	SalaryWage	BS (Cumulative)
Salary401K_Exp	Salary 401K Match Expense	SalaryWage	IS (Activity)
SalaryALB_Payable	Salary ALB Liability	SalaryWage	BS (Cumulative)

35 Rows Page 1 of 1


Control Lists

Control Lists maintain the content for grid drop-down lists in the People Register. If there are no entries in any specific Control List, then the related field on the People Register can have text entered.

GradeLevel InCode OutCode Code1 Code2 Code3 Code4 Code5 Code6 Code7 Code8 Code9 Code10 Code11 Code12 NCode1 NCode2 NCode3 NCode4 NCode5

If there are values entered, then the associated field can only select from the values in the Control List. The only member of the Control List selection not part of the People Register is *Reg XL Tmplt*. This field controls the list of Excel Register Templates available for download on the People Register Screen.

Settings

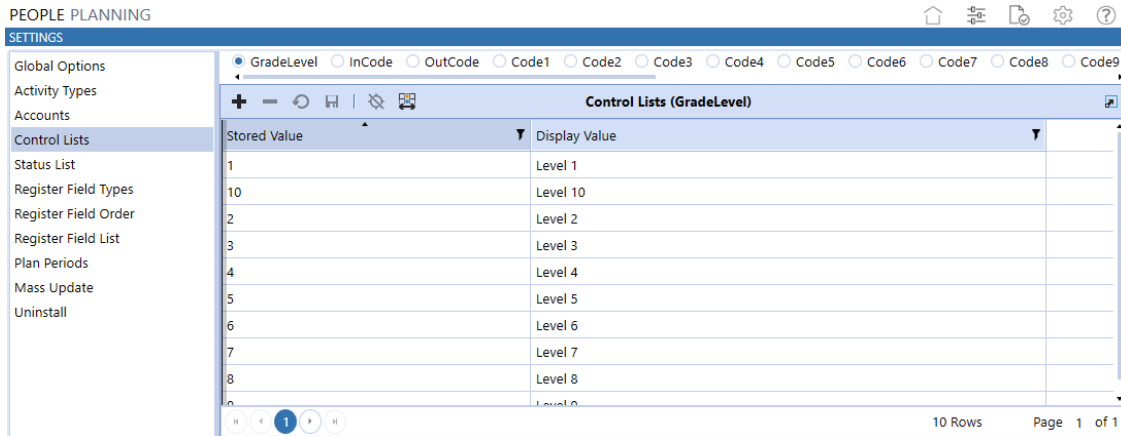

Code Fields

There are 26 Code fields that refine what is captured in the Register (such as People, Contracts, or Assets) in order to calculate the necessary planning/adjustment data or adjustments.

- **12 Text code fields** that can transition from text to date or numeric.
 - **See also:** [Register Field Types](#)
- **8 N** (Numeric) fields
- **4 D** (Data) fields
- **2 Annotation** (Text max data type, approximately 2 GB of text)

Status List

The Status List maintains the content for Status drop-down lists on the People Register and the Register Field List.

Settings

- **Status Value:** Drop-down list of Status Values.
- **Sort Value:** The order in which the status list values are displayed.

PEOPLE PLANNING

SETTINGS

Status Value	Sort Value
Active	A
NewHire	B
Trans	C
Split	D
Leave	E
Term	F
Contractor	Z

7 Rows Page 1 of 1

Register Field Types

This page allows data types for Codes 1-12 to be modified to be properly entered and stored. Options are *Text* (default), *Numeric*, or *Date*. Changes to these Field Types will change the column data type in the database tables after saving. For these flexible Code fields, if using Code1 as a numeric value, it is not necessary to refer to |Code1| as !|Code1| to return a number instead of a string if stored as a string (text), though that syntax is still supported.

The Administrator can only change the data type before data is stored.

Settings

PEOPLE PLANNING

SETTINGS

Global Options
Activity Types
Accounts
Control Lists
Status List
Register Field Types
Register Field Order
Register Field List
Plan Periods
Mass Update
Uninstall

Register Field Type List

Field Name	Field Type
Code1	Text
Code2	Text
Code3	Text
Code4	Text
Code5	Text
Code6	Text
Code7	Text
Code8	Text
Code9	Text
Code10	Text
Code11	Text
Code12	Text

12 Rows Page 1 of 1

NOTE: If the Administrator changes the data type in this screen to be different from Text, they need to change the default Excel load templates in the header tokens to reference the proper data type because Text is the default. Otherwise, loads from these template will fail.

Register Field Order

Controls the left-to-right order of how the Register will display properties. Assign a Register or Code field to a position to reflect the order in which these columns will be presented. Can only have a Code field listed once in this screen or an error will result.

Settings

PEOPLE PLANNING

SETTINGS

- Global Options
- Activity Types
- Accounts
- Control Lists
- Status List
- Register Field Types
- Register Field Order**
- Register Field List
- Plan Periods
- Mass Update
- Uninstall

Register Field Order List

Position	Field Name
3	Status
4	JobTitle
5	LastName
6	FirstName
7	Wage
8	Bonus
9	FTE
10	GradeLevel
11	HireDate
12	HirePeriod
13	TermDate
14	TermPeriod
15	OutPeriod

43 Rows Page 1 of 1

Register Field List

The Register Field List controls the fields on the People Register for each Status type. Fields can be visible or hidden, assign parameters, number formats, default values, etc.

Register Field Name: A static list of register items from the register table.

Alias: The name to display in the People Register grid header for the selected register field.

Visible: True / False setting indicating if the field should be visible on the register for the selected Status Type.

Allow Updates: True / False setting indicating if the register field allows updates.

Settings

Parameter Name: This field contains a drop-down list of all Parameters in the Compliance solutions. If a Parameter is assigned to a register field in this grid, then the field on the People Register is limited to the values defined in the Parameter. If a Parameter is not selected, then the People Register field is entered normally.

Format String: The number format applied to the selected register field. Available number formats are the same formats used in OneStream Cube Views. A list of valid formats can be found in the OneStream Object Lookup.

Column Width: A display setting specifying how wide the column should appear in the People Register (in pixels).

Default Value: The default value for the field when a new row is added.

PEOPLE PLANNING

SETTINGS

Global Options
Activity Types
Accounts
Control Lists
Status List
Register Field Types
Register Field Order
Register Field List
Plan Periods
Mass Update
Uninstall

Status: All

Register Field List (All)

Register Field Name	Alias	Visible	Allow Updates	Parameter Name	Format String	Column Width	Default Value
Annot1	Annot 1	<input type="checkbox"/>	<input checked="" type="checkbox"/>	NotUsed		160	
Annot2	Annot 2	<input type="checkbox"/>	<input checked="" type="checkbox"/>	NotUsed		160	
Bonus	Bonus	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	NotUsed	N2	100	0
Code1	Code 1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	ControlListCode1_PLPT		120	
Code10	Code 10	<input type="checkbox"/>	<input checked="" type="checkbox"/>	ControlListCode10_PLPT		120	
Code11	Code 11	<input type="checkbox"/>	<input checked="" type="checkbox"/>	ControlListCode11_PLPT		120	
Code12	Code 12	<input type="checkbox"/>	<input checked="" type="checkbox"/>	ControlListCode12_PLPT		120	
Code2	Code 2	<input type="checkbox"/>	<input checked="" type="checkbox"/>	ControlListCode2_PLPT		120	
Code3	Code 3	<input type="checkbox"/>	<input checked="" type="checkbox"/>	ControlListCode3_PLPT		120	
Code4	Code 4	<input type="checkbox"/>	<input checked="" type="checkbox"/>	ControlListCode4_PLPT		120	
Code5	Code 5	<input type="checkbox"/>	<input checked="" type="checkbox"/>	ControlListCode5_PLPT		120	
Code6	Code 6	<input type="checkbox"/>	<input checked="" type="checkbox"/>	ControlListCode6_PLPT		120	
Code7	Code 7	<input type="checkbox"/>	<input checked="" type="checkbox"/>	ControlListCode7_PLPT		120	
Code8	Code 8	<input type="checkbox"/>	<input checked="" type="checkbox"/>	ControlListCode8_PLPT		120	
Code9	Code 9	<input type="checkbox"/>	<input checked="" type="checkbox"/>	ControlListCode9_PLPT		120	
DCode1	DCode 1	<input type="checkbox"/>	<input checked="" type="checkbox"/>	NotUsed	MM-dd-yyyy	100	1900-01-01
DCode2	DCode 2	<input type="checkbox"/>	<input checked="" type="checkbox"/>	NotUsed	MM-dd-yyyy	100	1900-01-01
DCode3	DCode 3	<input type="checkbox"/>	<input checked="" type="checkbox"/>	NotUsed	MM-dd-yyyy	100	1900-01-01
DCode4	DCode 4	<input type="checkbox"/>	<input checked="" type="checkbox"/>	NotUsed	MM-dd-yyyy	100	1900-01-01
Entity	Entity	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	MemberListEntity_PLPT		100	None
FirstName	First Name	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	NotUsed		120	TBD
FTE	FTE	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	NotUsed	N2	100	1
GradeLevel	Grade Level	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	ControlListGradeLevel_PLPT	N0	120	1
HireDate	Hire Date	<input type="checkbox"/>	<input checked="" type="checkbox"/>	NotUsed	MM-dd-yyyy	100	CurrentDateTimeLocal
HirePeriod	Hire Period	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	PlanPeriodWithZeroList_PLPT	N0	100	1
InCode	In Code	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	ControlListIn_PLPT		100	

45 Rows Page 1 of 1

Plan Periods

Global Options contains a *Default Start Period* and *Default End Period* for Plan Data. If an entry is made here for a given Scenario, it takes precedent over what is in Global Options.

PEOPLE PLANNING

SETTINGS

Global Options	Plan Periods
Activity Types	Scenario
Accounts	Start Period
Control Lists	End Period
Status List	
Register Field Types	
Register Field Order	
Register Field List	
Plan Periods	
Mass Update	
Uninstall	
	1
	12

1 Rows Page 1 of 1

Mass Update

NOTE: Mass Update has restricted access.

The Compliance solutions store the loaded data and related solution objects using a text string reference to the Workflow Profile name that loaded the data into the Solution Data Register. The Workflow Profile name is stored as a text string rather than using the Workflow Profile's GUID identifier to provide optimum performance for the Calculate Plan function.

An issue may arise if the Workflow Profile that loaded data is renamed in OneStream. This will break the link between the Workflow Profile and the stored text string name in the Solution Data Register. The users in the renamed Workflow Profile will not see the data

that was previously loaded into the Solution Data Register because the new Workflow Profile name does not match the previously stored text string.

The Mass Update feature has been added to the Compliance solutions to resolve this issue when a Workflow Profile is renamed in the application. This feature allows the “orphaned” text string with the old Workflow Profile name to be selected and changed to a new Workflow Profile name. The solution presents the current list of application Workflow Profiles to select the new Workflow Profile name to update the solution text string name. This will establish the link to access the previously loaded Solution Data Register and related plan components with the new Workflow Profile name.

Step 1 in the Mass Update process requires the selection of the “orphaned” text string for the renamed Workflow Profile in area 1 of the *Mass Update* Dashboard. Then point it to the new Workflow Profile name from the application Workflow Profiles.

Step 2 requires entering an Update Description name for this change to be entered in area 2 of the *Mass Update* Dashboard. Click on the *Process* button to prepare the Mass Update changes. This will prepare the changes and store them in the *Mass Update* queue table. Notice that the change will now be listed in area 3 of the *Mass Update* Dashboard.

Step 3 is to select the change from the list in area 3 to be applied to the Solution Data Register and related components. Click on the Save button to commit these changes to the solution. If a change needs to be reversed for any reason, select the change from the list and click on the Restore button to revert the change back to the old text string name. Changes can be selected and deleted with the Delete button to remove them from section 3 but great care should be taken when doing this as this will remove the ability to Restore any changes that have been committed.

Settings

1) Set Workflow Profile to Remap

Current Workflow Profile Name

Filter

Houston.Import

New Workflow Profile Name

Filter

Total GolfStream Parent Adj.Import

Clubs Parent Adj.Import

US Clubs Parent Adj.Import

Frankfurt.Import

Frankfurt.SAP File

Houston.Import

2) Set Update Description & Process Update

Update Description:

Process

Clear

3) Save, Restore or Delete the Selected Update

Update List

Name	Description	Current Workflow Profile Name	New Workflow Profile Name	Saved	Information
------	-------------	-------------------------------	---------------------------	-------	-------------

Save

Restore

Delete

Uninstall

The Uninstall feature allows the Compliance User Interface or the entire solution to be uninstalled. Note that if this is performed as part of an upgrade, any modifications that were performed on standard Compliance objects will be removed. There are two Uninstall options:

- 1. **Uninstall UI** removes Compliance, including related dashboards and business rules but leaves the database and related tables in place. For some releases, this step should be performed before accepting any new version of Compliance since some of the Dashboards or other objects may have been modified.

- Choose this option if you want to accept a Compliance update without removing the data tables.
- The Compliance Release Notes will indicate if an overinstall is supported.

IMPORTANT: This procedure will reset the Workspace Dashboard Name to (Unassigned). An Administrator must manually reassign the Workspace Dashboard Name after performing an Uninstall UI.

2. **Uninstall Full** removes all the related data tables, all data, Compliance Dashboards, and Business Rules.
 - Choose this option to completely remove Compliance or to perform an upgrade that is so significant in its changes to the data tables that this method is required.

CAUTION: Uninstall procedures are irreversible.

Import Register Data

Once Compliance is set up, one of the first steps is to create a Data Source and attach it to the included Connector Business Rule in order to pull the People Plan data from the Compliance custom tables and load it into the OneStream Stage. Compliance tables are part of application database, so connection information is not required in the Connector Business Rule.

Create Data Source

1. Create a OneStream Connector Data Source
2. Select the *PLP_PeoplePlanningData* Connector

3. Assign Connector dimensionality as set below:

a. Scenarios

Assign to *WFScenarioName*

b. Time

Assign to *WFTimeName*

c. Entity Dim

Assign to Entity

d. Account Dim

Assign to Account

e. Flow Dim

Assign to Flow

f. IC

Assign to IC

g. UD1 – UDx

Assign appropriate UD from Connector Fields

h. Label

WFProfileName (used in Drill Back)

i. SourceID

Assign to *WFScenarioName (used in Drill Back)*

j. Amount

Assign to *Amt*

k. View

Set *Static Value* to *Periodic*

Transformation Rules

The *external* members created in the People Planning application need to be mapped to the OneStream Cube members. Follow the process defined in OneStream to create a Transformation Rule Profile to map this data.

Workflow Profile

Once a Data Source and Transformation Rules are created, they need to be assigned to the Workflow Profile(s) importing the data into the Cube.

Workflow Name	Workspace, Journal Input, Process, Confirm
---------------	--

If *Enable Journal Loading* is set to Yes in Global Options, the recommended Workflow Profile setup is to have a Workflow Name of *Workspace, Journal Input, Process, Certify* or a variation where *Workspace* comes before *Journal Input*. This Base Input type of *Journal (Adj)* Workflow Profile should also grant Workflow Execution Group access and Journal Process Group access and Read and Write Entity Group to the Entities posted. The same concept should apply to Parent Adjust Workflow Profiles.

IMPORTANT: You must reassign the Workspace Dashboard Name in the Workflow Profile after performing an Uninstall UI.

Help & Miscellaneous Information

^⑦ This page contains solution documentation.

Display Settings

OneStream Solutions frequently require the display of multiple data elements for proper data entry and analysis. Therefore, the recommended screen resolution is a minimum of 1920 x 1080 for optimal rendering of forms and reports.

Additionally, OneStream recommends that you adjust the Windows System Display text setting to 100% and do not apply any Custom Scaling options.

Package Contents & Naming Conventions

The package file name contains multiple identifiers that correspond with the Platform. Renaming any of the elements contained in a package is discouraged in order to preserve the integrity of the naming conventions.

Example Package Name: `TCR_PV6.2.0_SV100_PackageContents.zip`

Field	Description
TCR	Solution ID
PV6.2.0	Minimum Platform version required to run solution
SV100	Solution version
PackageContents	File name

Solution Database Migration Advice

A development OneStream application is the safest method for building out a solution with custom tables such as this one. The relationship between OneStream objects such as workflow profiles and custom solution tables is that they point to the underlying identifier numbers and not the object names as seen in the user interface. Prior to the solution configuration and to ensure the identifiers match within the development and production applications, the development application should be a recent copy of the production application. Once the development application is created, install the solution and begin design. The following process below will help migrate the solution tables properly.

See also: *Managing a OneStream Environment* in the *Design and Reference Guide*.

1. In the Production OneStream application, install the solution and create the data tables. See [Configure the OneStream Application Server](#) for Database Server Connection settings and installation details.
2. Data tables are created in the OneStream Development application during the solution installation. Using the [Microsoft Data Migration Assistant](#), copy the data from the tables to the Production Microsoft SQL Server Database. Only the Microsoft SQL Administrator should run the migration assistant.

IMPORTANT: This process has the potential to overwrite existing table data in the Production application database if data already exists.

OneStream Solution Modification

Considerations

A few cautions and considerations regarding the modification of OneStream Solutions:

- Major changes to business rules or custom tables within a OneStream Solution will not be supported through normal channels as the resulting solution is significantly different from the core solution.
- If changes are made to any dashboard object or business rule, consider renaming it or copying it to a new object first. This is important because if there is an upgrade to the OneStream Solution in the future and the customer applies the upgrade, this will overlay and wipe out the changes. This also applies when updating any of the standard reports and dashboards.
- If modifications are made to a OneStream Solution, upgrading to later versions will be more complex depending on the degree of customization. Simple changes such as changing a logo or colors on a dashboard do not impact upgrades significantly. Making changes to the custom database tables and business rules, which should be avoided, will make an upgrade even more complicated.

Appendix A: Expressions

Expressions are used in multiple areas of the Compliance solutions.

- OneStream uses ADO.NET engine to interpret expressions; there is no parser involved.
- The expression evaluator supports the following operators:
 - Open bracket '(' and close bracket ')'
 - Addition '+', subtraction '-', multiplication '*', division '/'
 - Modulo '%'
 - Equality '=', inequality '!='
 - Bigger than '>', bigger than or equal '>=', smaller than '<', smaller than or equal '<='
 - Logical and '&&', logical or '||'
 - Conditional 'IIF'
- Can use any Substitution Variable or Global Driver.
 - $(0.80 * |Wage|) + (0.20 * |Wage| * |Overtime|)$
- XFBR String
 - Calls and passes arguments to a Business Rule that can look up a value in a Cube or process conditions to return a value or string.
 - $(XFBR(PLP_ParamHelper, GetDriverValue, ud2Member=|Code2|, entityMember=|Entity|, accountMember=[Wage Increase Pct])) / 100 * |FTE|$
- XFCell (*may perform better than XFBR String*)

Appendix A: Expressions

- Queries Cube data cell value and can pass Substitution Variables and even XFBR's
- Missing members are retrieved from the POV
- $((\text{XFCell}(\text{E\#|Entity|:C\#Local:S\#BudgetV1:T\#2017M1:V\#Periodic:A\#[Wage Increase Pct]:F\#None:O\#Forms:I\#None:U1\#None:U2\#|Code2|:U3\#None:U4\#None:U5\#None:U6\#None:U7\#None:U8\#None})) * |Wage|) / 12$

Appendix B: Substitution Variables

Substitution Variables are used to exchange values at calculation time enabling building or more dynamic formulas and expressions.

Register Variables

- |RegisterID|
- |JobTitle|
- |JobTitle|
- |LastName|
- |FirstName|
- |Wage|
- |Bonus|
- |FTE| (*Full Time Employee %*)
- |GradeLevel|
- |Status|
- |HirePer| (*period hired*)
- |TermPer| (*period terminated*)
- |OutPer| (*for example, period transferred out, on leave, etc.*)
- |OutCode| (*for example, department transferred from*)
- |InPer| (*for example, period transferred in*)
- |InCode| (*for example, department transferred into*)

Appendix B: Substitution Variables

- |Entity| (*if known*)
- |Code1| to |Code8|

Calculations

- |CalcPer| (*Period calculated*)
- |CalcPerMth| (*Calculation period month*)
- |CalPerDays| (*Number of days in calculation period*)

Global Options (Defined on Settings Page)

- |PStartPer| (*Plan start period*)
- |PEndPer| (*Plan end period*)
- |PPerCount| (*Number of Plan periods*)

Workflow

- |WFProfileName|
- |WFScenarioName|
- |WFTimeName|

Appendix C: Calculations (Allocation Methods)

Certain solutions contain additional Value Types for expressions that are focused on these particular use cases:

Data Caching Examples (For example, Reporting Compliance)

- After Plan Data rows are added during Calculate Plan Data, this data can also be added to an in-memory Cache that's available during processing for later querying via sample Allocation Methods which call a XFBR String to pass over this data and return results that were added, min, max, added across periods, return number of days between Code1 & Code2 (for example), etc. In sample Allocation Methods provided with solutions such as Reporting Compliance, refer to **Custom Functions (XFBR)** and its equivalent Calculation Plan for several examples. More than likely the returned value will be an input into another function.
- Designed for when you have multiple Registers across multiple Instances of same Register item (e.g. Employee). Keeps an individual cache for each Register item across Instances. Designers will want these to be the highest Sequence in the Execution Plan. Order matters. These cross-Register Calculation Plans need to run late in the Execution Plan. An example is FICA (Social Security tax calculation) is one of the reasons but multiple instances of the same Register item makes this necessary. For example, caching would calculate all Salary Expense first and then apply a FICA calculation later in the Sequence for the Execution Plan. This is for calculations that cross Register Instances.

Appendix C: Calculations (Allocation Methods)

- There are Single Register Instance calculation reasons to use these caching examples. Caching could occur for a single Register Instance by using a later Sequence within a single Allocation Method. Example is adding up records from multiple Allocation Plan details within one Allocation Plan. Again, order matters.
- Think of these examples provided as Excel Sum/Min/Max etc. as a sample formula that can be copied, pasted and modified to the user's liking to fit their use case.

Examples:

- *Timespan Day*: Number of days between date fields.
- *Sum Account Period*: adds up an account value over a single period.
- *Sum Account Period Cumulative*: adds across previous periods, etc.
- *Sum Account Custom*: pass it criteria from any field in the Plan Data (also in the cache).
- More advanced example is *GetLimitResidual* (FICA example). This one is different since you pass in RegisterID, Account, Period, Field to Sum (or other math) on (such as Amount, NCode5, etc.). Any math performed must be on a numeric field in Plan Data. Note that this will not work against text-based Code1-12 since those are stored in Plan Data (and resulting Cache) but would work against fields like Amount, NCode1-8 and any other that is inherently stored as a decimal value.

Capital Planning

- **(1DB)Declining Balance**: Depreciation-calculation system that involves applying the [depreciation](#) rate against the non-depreciated balance. Instead of spreading the cost of the [asset](#) evenly over its life, this system expenses the asset at a constant

Appendix C: Calculations (Allocation Methods)

rate, which results in declining depreciation charges each successive period.

- The declining balance formula is: $1 \times \text{Straight-line depreciation rate} \times \text{Book value at the beginning of the year}$.
- **(1.5DB) Declining Balance:** Accelerated form of depreciation under which the vast majority of the depreciation associated with a fixed asset is recognized during the first few years of its useful life.
 - The 1.5 declining balance formula is: $1.5 \times \text{Straight-line depreciation rate} \times \text{Book value at the beginning of the year}$.
- **(2DB) Declining Balance:** Accelerated form of depreciation under which the vast majority of the depreciation associated with a fixed asset is recognized during the first few years of its useful life.
 - The double declining balance formula is: $2 \times \text{Straight-line depreciation rate} \times \text{Book value at the beginning of the year}$.
- **(SL) Straight Line:** Straight line depreciation method charges cost evenly throughout the useful life of a fixed asset.
 - The Straight Line formula is: $(\text{Cost} - \text{Residual Value}) \times \text{Rate of depreciation}$.
- **(SYD) Sum Years Digits:** Sum of the years' digits method of depreciation is one of the accelerated depreciation techniques which are based on the assumption that assets are generally more productive when they are new, and their productivity decreases as they become old.
 - The Sum of Years Digits formula is: $(\text{Cost} - \text{Residual Value}) \times (\text{Remaining Useful Life} / \text{Sum of Years Digits})$

Cash Planning

Appendix C: Calculations (Allocation Methods)

- Interest Daily
- Interest Monthly
- Interest Annual
- Cash Term Impact


Appendix D: Custom Event Model

Compliance solutions support custom event models using Business Rules. The feature will be demonstrated in this document with the Reporting Compliance solution.

Set up the Custom Event Model

The steps to set up custom events are detailed below:



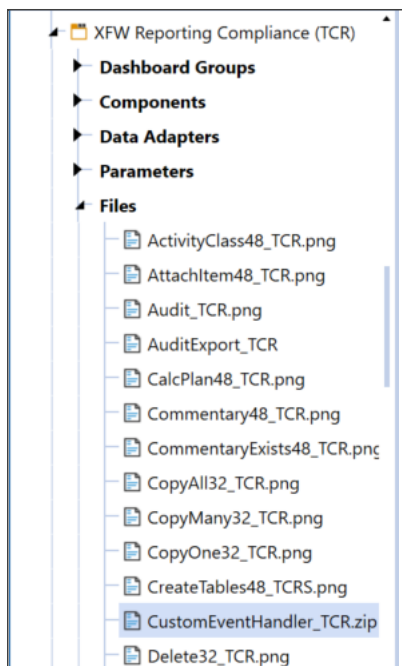

1. Download *CustomEventHandler_TCR.zip* from the Application Dashboard screen.



2. Import the downloaded file from the Application Load/Extract screen.
3. Update the *TCR_SolutionHelper* script to integrate with the CustomEvents scripts:

Appendix D: Custom Event Model

- a. Add *BR\CustomEvents_ReportingCompliance* in the Referenced Assemblies section of the *TCR_SolutionHelper* script.

Properties		Formula
General		
Name	CustomEvents_ReportingCompliance	
Type	Dashboard Extender	
Referenced Assemblies	BR\CustomEvents_ReportingCompliance	
Is Encrypted	False	
Security		
Access Group	Everyone	 
Maintenance Group	Everyone	 

- b. Find the declaration of the variable *m_CustomEvents* and change as shown in the following example.

```
323 #Region "Constants and Enumerations"
324
325 ' CustomEvent Handler Declaration
326 ' Dim m_CustomEvents As Object = Nothing
327 Dim m_CustomEvents As New OneStream.BusinessRule.DashboardExtender.CustomEvents_ReportingCompliance.MainClass
```

- c. After the custom event integration is set up, event actions can be defined in the *CustomEvents_ReportingCompliance* script.

NOTE: These events are not deleted or overridden when upgrading to new versions of the Compliance solutions but the setup steps must be repeated with every installation.

Available Events

Available custom events are listed in this section.

Before / After Selection Changed Events

These events run before / after a custom control is clicked.

Example: *Delete Plan* will run any defined code in the *DeletePlan* section before/after the actual deletion of the plan data.

- SaveSettings
- CreateSolutionTables
- ValidateSetupStepsExecuted
- Uninstall
- CopyActivityClassToOne
- CopyRegisterPlanToOne
- CopyCalcPlanToOne
- CopyRegisterPlanToMany
- CopyRegisterAndDetail
- DeleteActivityClassDetail
- DeleteRegisterOrRegisterPlan
- CalculatePlan
- DeletePlan
- WorkflowComplete
- WorkflowRevert
- ImportXLSXFile
- ImportRegisterConnector

Before / After Save Data Events

These events run before / after the save event for the listed grid types.

Example: Use to test grid data prior to saving and potentially not allowing the data to be saved if a check is failed.

- SaveRegisterRows
- SaveCalcPlanDetailRows
- SaveStatusRows
- SaveAccountRows
- SaveActivityTypeRows

Register Restriction on Calculation Event

This event allows the tailoring of the SQL WHERE clause against Register Items before applying Calculations, eliminating unnecessary application of calculations.

Example: Applying all calculations against all register items may not be necessary and consume resources unnecessarily. Use to limit the number or register items before being applied against the calculations.

- SetCustomWhereClause

Appendix E: Solution Audit BR Functions

The following functions in the *TCR_SolutionHelper* Business Rule provide the Solution Audit feature:

```
6846 #Region "Audit Log Helpers"
6847
6848 Public Sub LogTableEditorSave(ByVal si As SessionInfo, ByVal
6891
6892 Public Sub WriteTableEditLog(ByVal si As SessionInfo, ByVal
6911
6912 Public Sub WriteFileArchiveLog(ByVal si As SessionInfo, By
6950
6951 Private Function GetAuditLogTableForAppend(ByVal si As Ses
6963
6964 Private Function CreateCopyRegisterAuditInfo(ByVal si As
6991
6992 Private Function CreateCopyExceptionPlanAuditInfo(ByVal si
7023
7024 Private Function CreateCopyCalcPlanAuditInfo(ByVal si As
7050
7051 #End Region
7052
7053 #Region "Audit Log Analysis Helpers"
7054
7055 Public Function GetAuditLog(ByVal si As SessionInfo, ByVal
7095
7096 Public Function GetAuditLogFiles(ByVal si As SessionInfo,
7146
7147 Public Function OnShowAuditPage(ByVal si As SessionInfo) /
7164
7165 Public Function RefreshAuditLogDashboard(ByVal si As Sessi
7186
7187 Public Function CopyAuditFileToUserTempFolder(ByVal si As
7220
7221 #End Region
-----
```

These Business Rule functions are available for review as example code and to be called from other custom Business Rules. The Solution Audit functionality has been tagged with “**#AuditLog**” comments to make easier to locate the functions and example of calls to use these functions. This will assist administrators and implementors in reviewing the

related code to extend the functions to other custom Business Rules or Dashboards/Data Entry Forms with activities that are triggered by buttons that may need to be included in the Solution Audit Logging.

TCR_SolutionHelper Code and Sample Calls

The TCR_SolutionHelper Business Rule can be reviewed by going to the Application | Tool | Business Rules | Dashboard Extender | TCR_SolutionHelper tab. Search for the code sections tagged with “**#AuditLog**” comments to review the Solution Audit code and calls to use this code.

Here is one example of a call in the TCR_SolutionHelper Business Rule code that calls the Solution Audit functions to handle archiving an import Excel file:

```
5547 'Archive the file
5548 '#AuditLog
5549 Dim wfDesc As String = "Workflow: " & BRApi.Workflow.General.GetWorkflowUnitClusterPkDescription(si, si.WorkflowClusterPk)
5550 Dim logMessage As New Text.StringBuilder
5551 logMessage.Append(wfDesc)
5552
5553 For Each range As TableRangeContent In loadResults
5554     logMessage.Append(", Table: " & range.TableName)
5555     logMessage.Append(", Load Method: " & range.LoadMethod)
5556 Next
5557
5558 'logMessage.Remove(logMessage.Length-2, 2)
5559
5560 Me.WriteFileArchiveLog(si, AuditLogGroupTypes.ImportFile.ToString, AuditLogObjectTypes.File.ToString, AuditLogActionTypes.Import.ToString, logMessage.ToString, DateTime.UtcNow, filePath)
5561
5562 'Delete the temp file
5563 BRApi.FileSystem.DeleteFile(si, FileSystemLocation.ApplicationDatabase, filePath)
```

The sample code text for the screen shot above is:

‘Archive the file

‘#AuditLog

Dim wfDesc As String = "Workflow: " &

BRApi.Workflow.General.GetWorkflowUnitClusterPkDescription(si,
si.WorkflowClusterPk)

Dim logMessage As New Text.StringBuilder

logMessage.Append(wfDesc)

For Each range As TableRangeContent In loadResults

Appendix E: Solution Audit BR Functions

```
logMessage.Append("; Table: " & range.TableName  
logMessage.Append(", Load Method: " & range.LoadMethod)
```

Next

```
'logMessage.Remove(logmessage.Length-2, 2)  
Me.WriteFileArchiveLog(si, AuditLogGroupTypes.ImportFile.ToString,  
AuditLogObjectTypes.File.ToString, AuditLogActionTypes.Import.ToString,  
logMessage.ToString, DateTime.UtcNow, filePath)
```

Appendix F: Excel Templates

For additional information regarding Excel templates, see *Data Collection Guides* in the *Design and Reference Guide*.

Loading Excel Templates to Custom Tables

OneStream Solutions typically have some SQL Server tables related to them. Other custom solutions may include adding custom SQL Server tables as well. This technique allows the user to load data to these custom tables via an Excel template. The mechanism for loading these tables could either be through the user interface of a OneStream Solution or through OneStream Extensibility Rules.

OneStream reads this template using a specific Named Range which is explained later in this section. Ensure the following information is included in the Named Range.

In the first three rows of the Named Range in Column A, specify the following:

Database Location: Application or System specifies which database contains the custom tables.

Table Name: Custom tables only; enter the Table name

Load Method: The load method determines the action and any additional criteria for the action. The syntax is:

Action:[Where Clause Criteria] (*Where Clause Criteria is optional*)

Load Method Definitions

IMPORTANT: Import templates do not support changing the Load Method.

Load Method	Description	Example
Merge	If there are no criteria, Merge updates the data if it finds a matching key, otherwise it inserts it	<p>Merge Where Clause Criteria Example</p> <p>First, this will clear the values for emp1 and then Merge</p> <p>Merge:[EmployeeID = 'emp1']</p> <p>Merge Where Clause Criteria with Substitution Variable Example</p> <p>Substitution Variables can be used in the Where Clause Criteria</p> <p>Merge:</p> <p>[WFProfileName = 'WFProfile']</p>

Load Method	Description	Example
Replace	If there are no criteria, <i>Replace</i> clears everything first. By default, instead of merging, it clears the entire table. This will perform better for high volume because it does not try to match rows from the file to the table. An error will occur if it finds a match.	Replace Where Clause Criteria Example This does not try to locate, it only does inserts and appends. Replace: [EmployeeID = 'emp1'] Replace Where Clause Criteria with Substitution Variable Example Replace: [WFProfileName = ' WFProfile ']

Next, define the Field Types and Field Names beginning in Column A Row 4 and spanning as many columns as necessary.

The column definition syntax is:

FieldType#:[FieldName]:StaticValue(optional):DefaultValue(optional)

Field Type: This relates to the column name in the table.

- **xfGuid:** Unique identifier [SQL = uniqueidentifier]
- **xfText:** Text defined column in the table [SQL = nvarchar, nchar, ntext]
- **xfInt:** Short integer (*4 byte integer*) [SQL = int]

Appendix F: Excel Templates

- **xfBit:** 0,1 (*True, False*) [SQL = bit]
- **xfDec:** Decimal [SQL = Decimal (28,9)]
- **xfDbf:** Floating point number (*8 byte floating*) [SQL = Float]
- **xfDateTime:** Date [SQL = datetime]

Field Name: This is specific to the SQL table to be loaded.

StaticValue : Whatever is specified as the Static Value will override every row for that column regardless if it is blank or not.

- **Example:** This example will override all rows and enter 50,000 as the Static Value.
`xfDec#:[Salary]:50,000`

DefaultValue: This only applies to blank rows.

NOTE: If something is specified in the Static Value, it will ignore whatever is in the DefaultValue.

- **Example:** This example will enter a New Guid for all blank rows in the column.
`xfGuid#:[EmployeeID]::NewGuid`

Substitution Variable Example: Substitution Variables can be used in both *StaticValue* and *DefaultValue*.

`xfText#:[EmployeeName]::|Username|`

	A	B	C	D	E
1	Application				
2	XFT_Employee				
3	Merge				
4	xfGuid#:[EmployeeID]	xfText#:[EmployeeName]	xfInt#:[GradeLevel]	xfBit#:[Active]	xfDec#:[Salary]
5	E82BD657-C198-41D8-92CB-F3819D0EAF03	John Doe	21	TRUE	250,000.00
6	D01A9E9C-84E1-4BE2-95DA-3B84EFA91D58	Jane Doe	22	FALSE	265,000.00

Finally, create a Named Range beginning with *XFT* making sure to include the entire template.

Appendix F: Excel Templates

xftEmployeeInfo	:	X	✓	fx	Application
	A	B	C	D	E
1	Application				
2	XFT_Employee				
3	Merge				
4	xfguid#:[EmployeeID]	xfText#:[EmployeeName]	xfInt#:[GradeLevel]	xfBit#:[Active]	xfDec#:[Salary]
5	E82BD657-C198-41D8-92CB-F3819D0EAF03	John Doe	21	TRUE	250,000.00
6	D01A9E9C-84E1-4BE2-95DA-3B84EFA91D58	Jane Doe	22	FALSE	265,000.00

Once the template is complete, it is ready to be loaded into the custom table. If this is being used in conjunction with a OneStream Solution, refer to the solution for further instructions on how to load the template to the table. If this is being loaded via an Extensibility Business Rule, refer to the following example:

```
Dim fieldTokens As New List(Of String)
fieldTokens.Add("xfGuid#:[EmployeeID]::NewGuid")
' fieldTokens.Add("xfGuid#:[EmployeeID]")
fieldTokens.Add("xfText#:[EmployeeName]")
' fieldTokens.Add("xfText#:[EmployeeName]::|Username|")
fieldTokens.Add("xfInt#:[GradeLevel]")
fieldTokens.Add("xfBit#:[Active]")
fieldTokens.Add("xfDec#:[Salary]")
fieldTokens.Add("xfDbl#:[VacationDays]")
fieldTokens.Add("xfDateTime#:[HireDate]")
BRApi.Utilities.LoadCustomTableUsingDelimitedFile(si,
SourceDataOriginTypes.FromFileShare, filePath, Nothing, ",",
dbLocation, tableName, loadMethod, fieldTokens, True)
```